

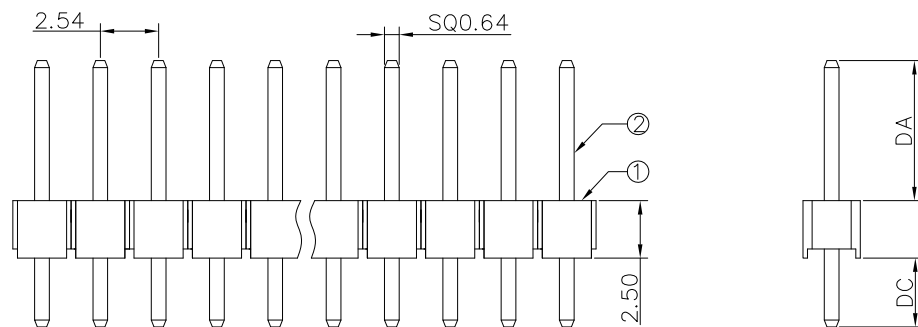


REV.	DESCRIPTION	DATE
A	New Drawing	2011/08/29

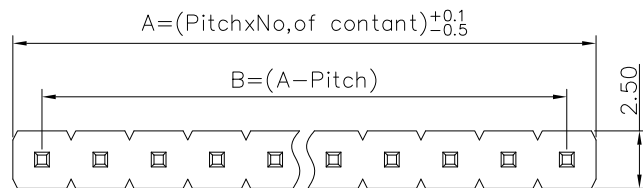

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX


Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min



P.C.B LAYOUT

RoHS compliant

P H E S - D S X X X G 1 A B O N A - A X X X

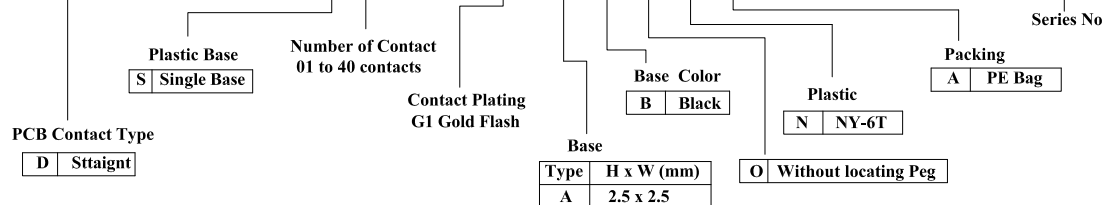

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	2.54mm Pin Header Straight Single Row	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Annie	12-28-18'	002
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	Annie	12-28-18'	P H E S - D S X X X G 1 A B O N A - A X X X
角度 ± 5°	APPROVED	DATE	CUSTOMER NO.
	Tom	12-28-18'	

REV.	UNIT	SCALE
B	mm	3:1

