

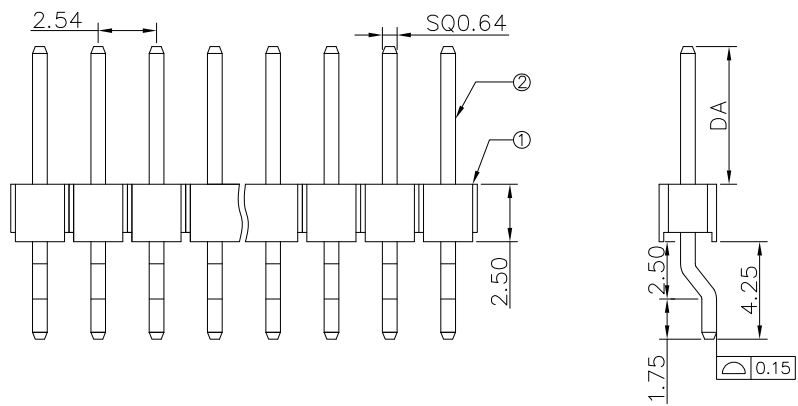


REV.	DESCRIPTION	DATE
A0	New Drawing	2009/06/19

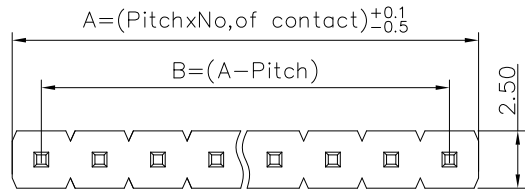

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX


Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min

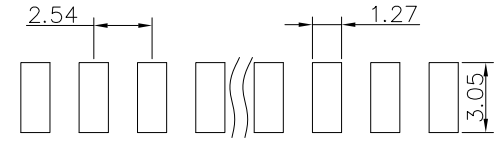

P.C.B LAYOUT

RoHS compliant

P H E S - H S X X X G 1 A B O N G - B X X X

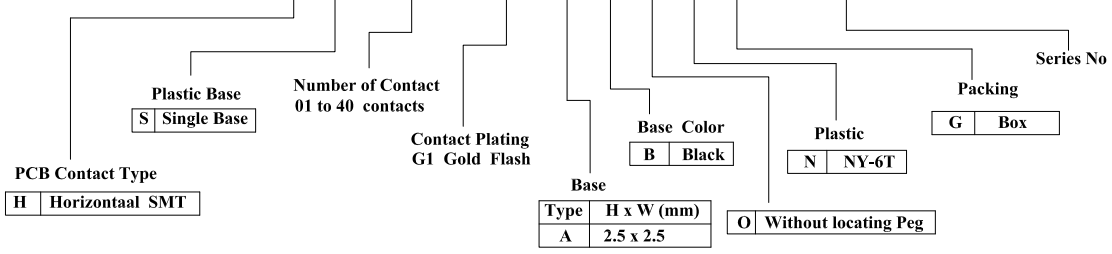

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	2.54Pin Header Single Row, Horizontal SMT	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		ZhaoXiaoLin	06-19-09'	002
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		XiaoPing	06-19-09'	P H E S - H S X X X G 1 A B O N G - B X X X
角度 ± 5°		APPROVED	DATE	CUSTOMER NO.
		JOHN	06-19-09'	

REV.	UNIT	SCALE	
A0	mm	3:1	