

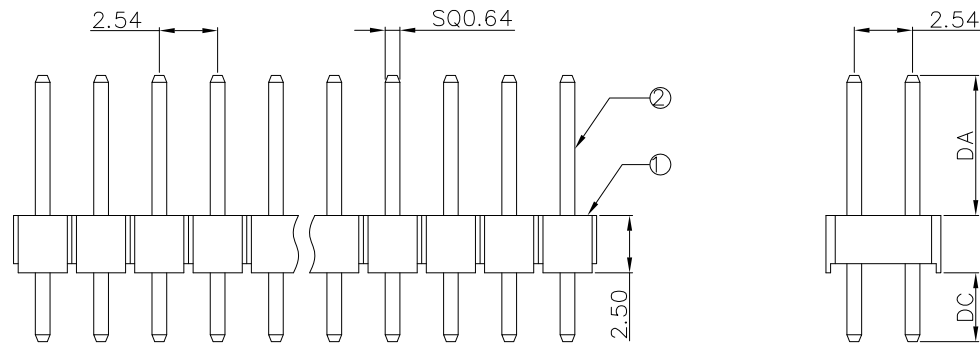


REV.	DESCRIPTION	DATE
A	New Drawing	2014/01/10

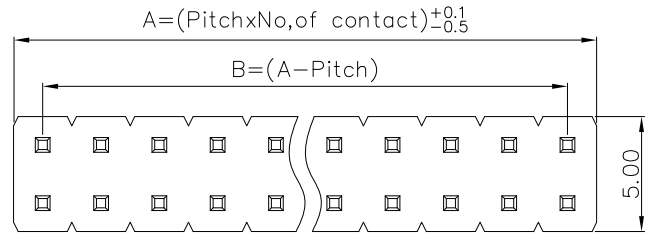

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	xx


Temperature Rating : -40°C ~ +125°C .  
Dielectric Withstanding Voltage : 1000V AC/Min

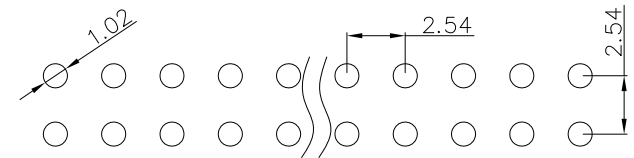

### P.C.B LAYOUT

RoHS compliant

**P H E D - D S X X X G 1 A B O N X - A X X X**

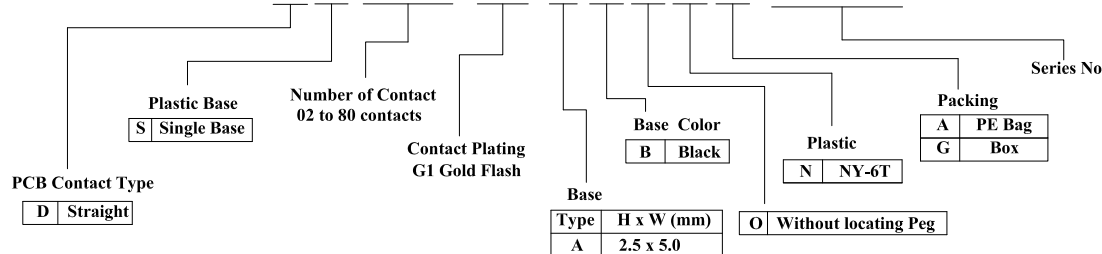

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE	Pitch 2.54x2.54mm Pin Header Straight Dual Rows	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	尹素平	01-10-14'	002
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	PHED-DSXXXG1ABONX-AXXX
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	3:1

