

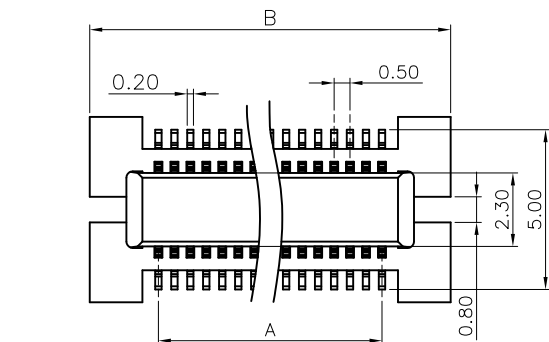
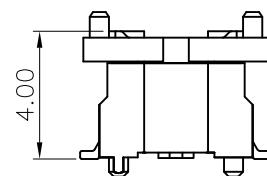



Mating with:
"BAAB-XXXG1300NWLX-B"

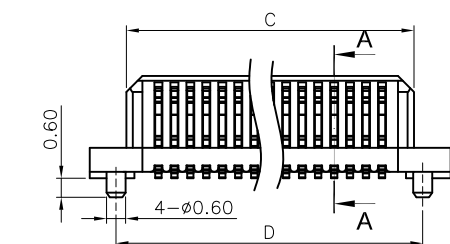

Mating Height Drawing

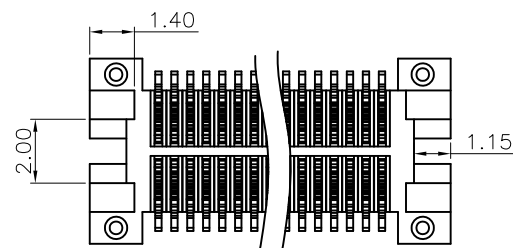

Circuit No.	Dimensions			
	A	B (A+4.3)	C (A+2.0)	D (A+2.6)
2*15P	7.00	11.30	9.00	9.60
2*20P	9.50	13.80	11.50	12.10

BBAB-XXXG1095NDLI-B

Number of Contact
30, Contact

Contact Plating
G1 Gold flash

Height

H 0.95mm

Base Color
N Natural

Plastic
L LCP


Packing
I Reel

Series No.

D With locating Peg without fitting nail

: SOLDER AREA

TOLERANCE: ± 0.05 ,
RECOMMENDED PCB LAYOUT
(TOP VIEW)

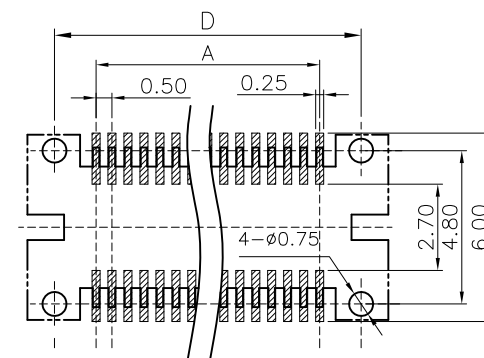

REV.	DESCRIPTION	DATE
A	NEW DRAWING	2014/02/24

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX

Temperature Rating : -40°C ~ +105°C .
Dielectric Withstanding Voltage : 300 V AC/Min

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance		TITLE PH0.5 BTOB H0.95 合高4.0 公座成品	
X. ± 0.5		DRAWN 尹素平	DATE 02-24-14'
.X ± 0.3		CHECK	DATE
.XX ± 0.2		APPROVED	DATE
.XXX ± 0.1		DWG.NO. 002	
角度	$\pm 5^\circ$	PART NO. BBAB-XXXG1095NDLI-B	
		CUSTOMER NO.	