
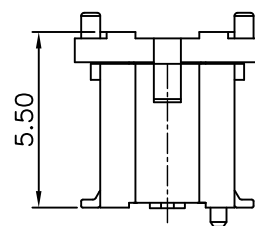


Mating with:
"BAAJ-040G1450BWL1-B"





REV.	DESCRIPTION	DATE
A	NEW DRAWING	2014/02/24

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze	Current Rating : 0.5 A Initial : 30m Ohms Max.	40

Temperature Rating : -40°C ~ +105°C .
Dielectric Withstanding Voltage : 300 V AC/Min

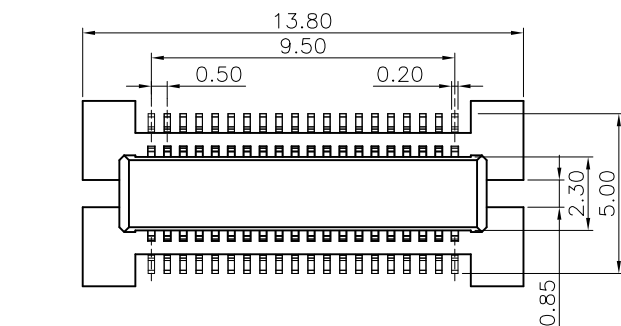


Mating Height Drawing

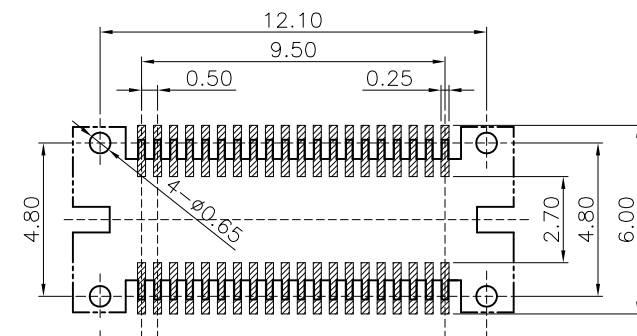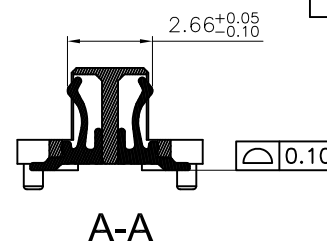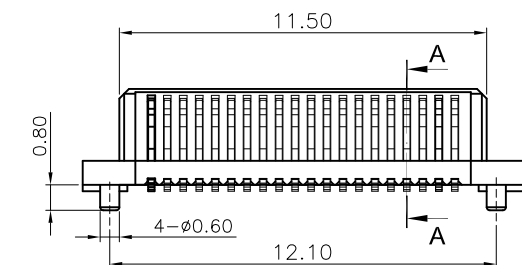

▨ : SOLDER AREA

TOLERANCE: ±0.05,
RECOMMENDED PCB LAYOUT
(TOP VIEW)

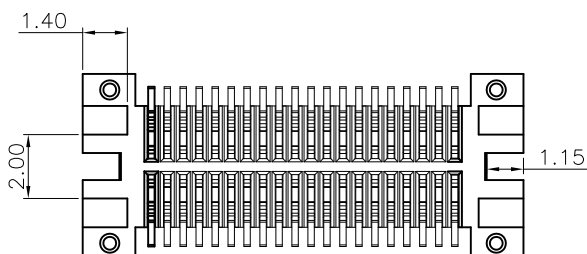

BBAB - 040 G1 095 B D L I - B

Number of Contact
40, Contact

Contact Plating
G1 Gold flash

Height
H 0.95mm

Base Color
B Black

Plastic
L LCP

Packing
I Reel

D With locating Peg without fitting nail

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance	
X. ± 0.5	
.X ± 0.3	
.XX ± 0.2	
.XXX ± 0.1	
角度	± 5°

TITLE PH0.5 BTOB H0.95 公座成品			
DRAWN	尹素平	DATE	02-24-14'
CHECK		DATE	
APPROVED		DATE	
DWG.NO.		002	
PART NO.		BBAB-040G1095BDLI-B	
CUSTOMER NO.			