


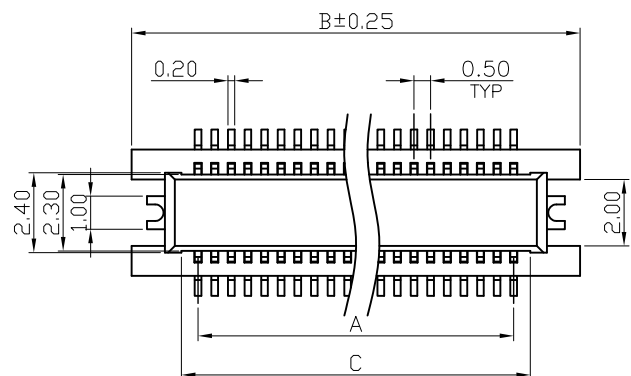
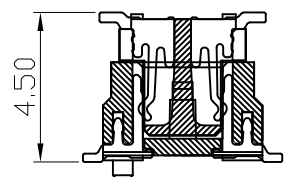



REV.	DESCRIPTION	DATE
A	最新料號版	2012/01/16



A-A
SECTION

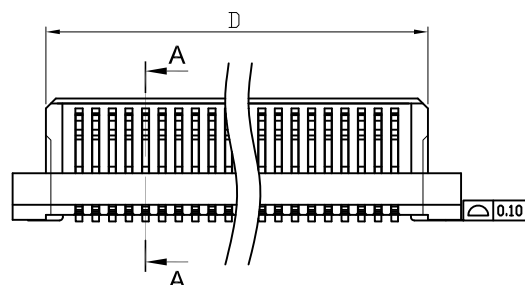

Mating Height Drawing

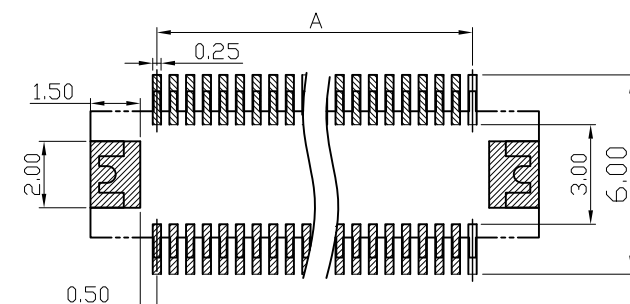

 : SOLDER AREA
 TOLERANCE: ± 0.05 ,
 RECOMMENDED PCB LAYOUT
 (TOP VIEW)

Mating with:
"BAAB-XXXG1300NWLX-B"

BBAB - XXXG1145NCLI-B

Number of Contact
40,50,80 Contact

Contact Plating
G1 Gold flash

Height
H 1.45mm

Base Color
N Natural

Plastic
L LCP

Packing
I Reel

C Without locating Peg with fitting nail

Circuit No.	Dimensions			
	A	B (A+4.0)	C (A+1.0)	D (A+2.0)
2*20P	9.50	13.50	10.50	11.50
2*25P	12.00	16.00	13.00	14.00
2*40P	19.50	23.50	20.50	21.50

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

X. ± 0.5

.X ± 0.2

.XX ± 0.10

.XXX ± 0.05

角度

$\pm 5^\circ$

TITLE PH0.5 BTOB H1.45 公座成品

DRAWN

廖宇

DATE

2012/01/16

DWG.NO.

002

CHECK

DATE

PART NO.

BBAB-XXXG1145NCLI-B

APPROVED

DATE

CUSTOMER NO.

REV.

A

UNIT

mm

SCALE

1:1

