


REV.	DESCRIPTION	DATE
A	New Drawing	2022/02/14

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Mylar	PI	250°C for 10 Seconds .	1


Temperature Rating : -40°C ~ +125°C .  
Dielectric Withstanding Voltage : 500V AC/Min

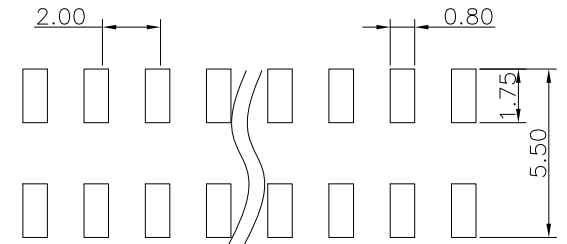

### P.C.B LAYOUT

RoHS compliant


**PHDD-HSXXXG1ABONX-BXXX**

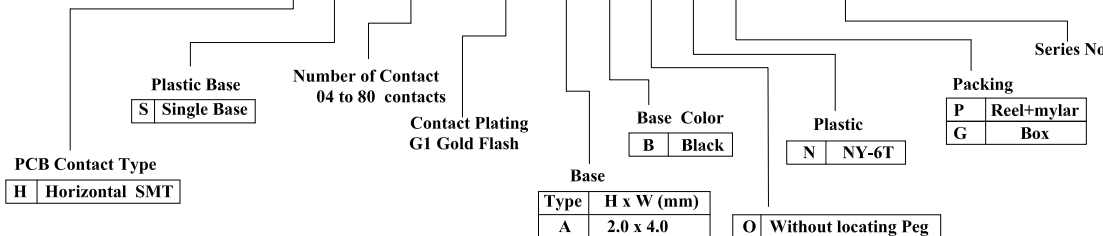

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE	2.0x2.0mm Pin Header ,Horizontal SMT Dual Row	
X.	± 0.5	DRAWN	DATE	NO.
.X	± 0.3	Tom	02-14-22'	002
.XX	± 0.2	CHECK	DATE	PART NO.
.XXX	± 0.1	APPROVED	DATE	PHDD-HSXXXG1ABONX-BXXX
角度	± 5°			CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	1:1



(Q2-R03-01A) ST-R05-07