
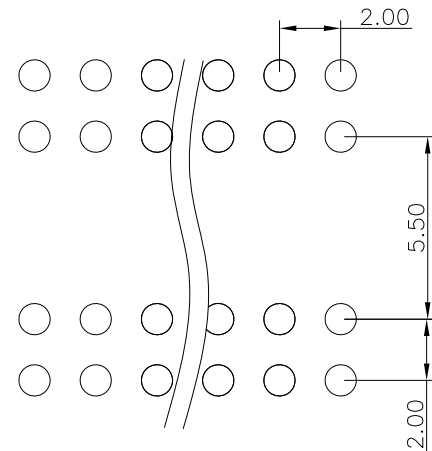


PHDD - U S XXXX G1 A B O N G - C XXXX

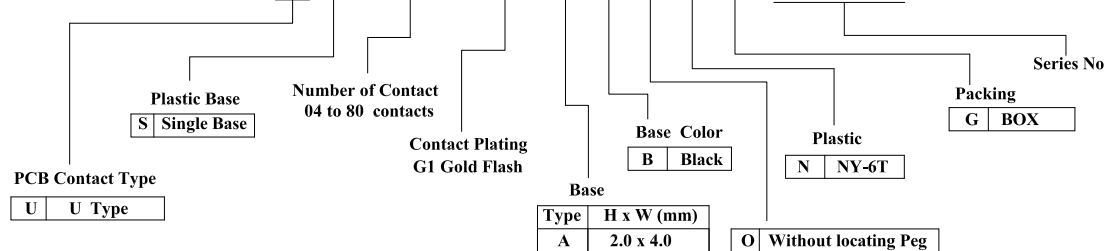

P.C.B LAYOUT

RoHS compliant

REV.	DESCRIPTION	DATE
A	New Drawing	2007/6/16

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +105°C .
Dielectric Withstanding Voltage : 500V AC/Min

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		2.0 x 2.0Pin Header, Right Angle Dual row	
X. ± 0.5		DRAWN		DATE	NO.
.X ± 0.3		ZhaoXiaoLin		09-10-07'	002
.XX ± 0.2		CHECK		DATE	PART NO.
.XXX ± 0.1		Fuqianshan		09-10-07'	PHDD-USXXXXG1ABONG-CXXXX
角度	± 5°	APPROVED		DATE	CUSTOMER NO.
		Jhen-fa		09-10-07'	

REV.	UNIT	SCALE	
A	mm	4:1	

(Q2-R03-01A) ST-R05-07