


REV.	DESCRIPTION	DATE
A	New Drawing	2022/05/10

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Cap	LCP UL94V-0	260°C for 10 Seconds .	1

Temperature Rating : -40°C ~ +125°C .  
Dielectric Withstanding Voltage : 1000V AC/Min

**P H E S - A S X X X G 1 A B O N X - B X X X**

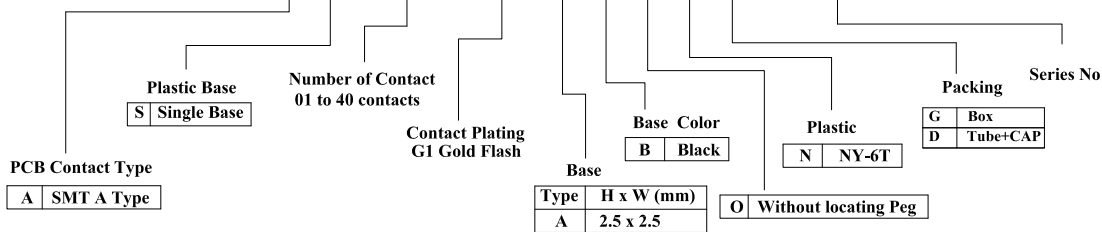

**P.C.B LAYOUT**

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE
X. ± 0.5	DRAWN
.X ± 0.3	Jacky
.XX ± 0.2	CHECK
.XXX ± 0.1	Tom
角度	APPROVED
± 5°	Tom

2.54Pin Header Single Row,SMT			
DATE	NO.		
05-10-22'	002		
DATE	PART NO.		
05-10-22'	P H E S - A S X X X G 1 A B O N X - B X X X		
DATE	CUSTOMER NO.		
05-10-22'			

REV.	UNIT	SCALE
A	mm	1:1

