









Compliance with:
 PCIe4.0(GT/S),
 USB4 V2.0(GEN4)(80Gbps),
 USB4 Gen3(40Gbps) ,
 USB3.2 Gen2(10Gbps).
 Mating with:
 "BBAD-020G1145BOLI-B"



▨ : STAND OFF AREA

P.C.B LAYOUT

RoHS compliant

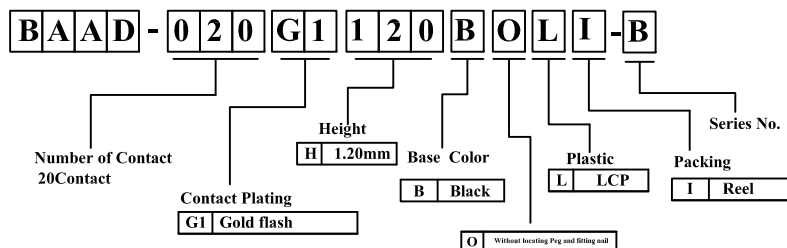

REV.	DESCRIPTION	DATE
A	New Drawing	2016/04/26

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	20

Temperature Rating : -40°C ~ +105°C .
 Dielectric Withstanding Voltage : 300 V AC/Min

Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance	TITLE	PH0.5 BTOB H1.2 20PIN Female	
X. ± 0.5	DRAWN Tom	DATE	NO.
.X ± 0.3		04-26-16'	002
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	BAAD-020G1120BOLI-B
Angle ± 5°		DATE	CUSTOMER NO.

(Q2-R03-01A) ST-R05-07