
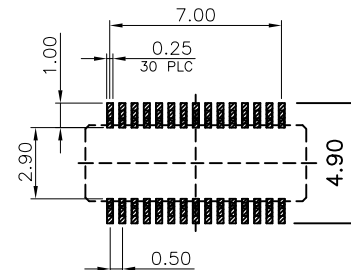







REV.	DESCRIPTION	DATE
A	New Drawing	2013/11/27

Compliance with:  
 PCIe4.0(GT/S),  
 USB4 V2.0(GEN4)(80Gbps),  
 USB4 Gen3(40Gbps),  
 USB3.2 Gen2(10Gbps).  
 Mating with:  
 "BBAD-030G1145BOLI-B"

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	30


Temperature Rating : -40°C ~ +105°C .  
 Dielectric Withstanding Voltage : 300 V AC/Min



▨ : STAND OFF AREA

## P.C.B LAYOUT

RoHS compliant

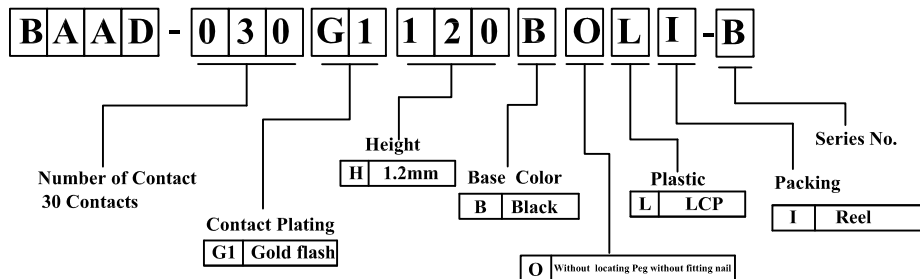

# Superior Tech Co., Ltd.

General Tolerance		TITLE	PH0.5 BTOB H1.2 30PIN Female	
X.	± 0.5	DRAWN	DATE	NO.
.X	± 0.3	Tom	11-27-13'	002
.XX	± 0.2	CHECK	DATE	PART NO.
.XXX	± 0.1	APPROVED	DATE	BAAD-030G1120BOLI-B
Angle	± 5°			CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	1:1

