





Compliance with:  
 PCIe4.0(GT/S),  
 USB4 V2.0(GEN4)(80Gbps),  
 USB4 Gen3(40Gbps),  
 USB3.2 Gen2(10Gbps).  
 Mating with:  
 "BAAD-020G1120BOLI-B"




A-A



▨ : STAND OFF AREA

**P.C.B LAYOUT**

RoHS compliant

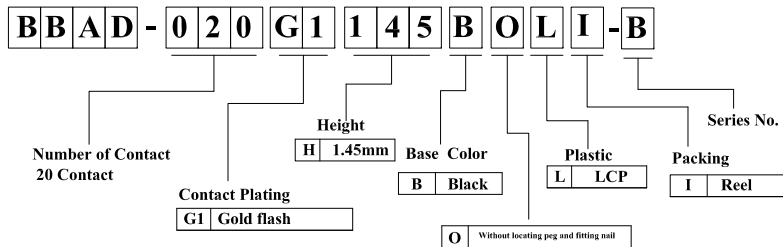

REV.	DESCRIPTION	DATE
A	New Drawing	2016/04/26

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	20

Temperature Rating : -40°C ~ +105°C .  
 Dielectric Withstanding Voltage : 300 V AC/Min

**Superior Tech Co., Ltd.**

General Tolerance		TITLE	PH0.5 BTOB H1.45 20PIN Male	
X.	± 0.5	DRAWN	DATE	NO.
.X	± 0.3	Tom	04-26-16'	002
.XX	± 0.2	CHECK	DATE	PART NO.
.XXX	± 0.1	APPROVED	DATE	BBAD-020G1145BOLI-B
Angle	± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	