

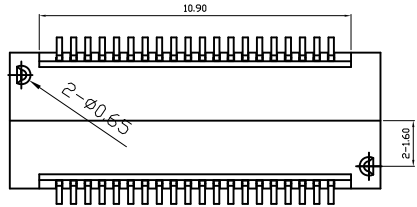

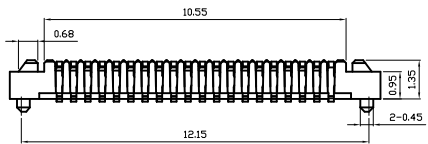




Compliance with:
 PCIe4.0(GT/S),
 USB3.2 Gen2(10Gbps),
 USB3.2 Gen2 Type C(10Gbps)
 Mating with:
 "BBAF-040G1125NDLI-B"

REV.	DESCRIPTION	DATE
A	New Drawing	2012/02/27

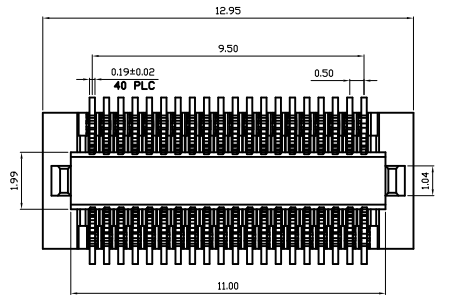

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	40


Temperature Rating : -40°C ~ +105°C .
 Dielectric Withstanding Voltage : 300 V AC/Min

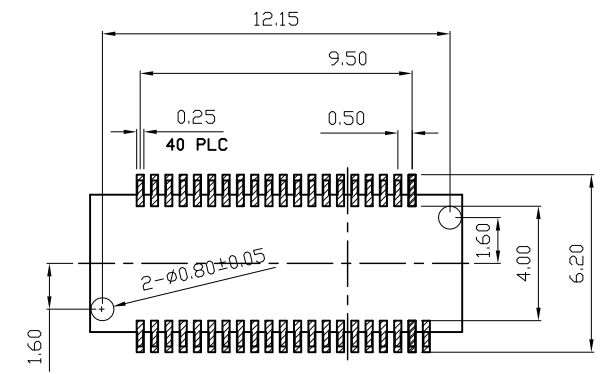

▨ : STAND OFF AREA

P.C.B LAYOUT

RoHS compliant

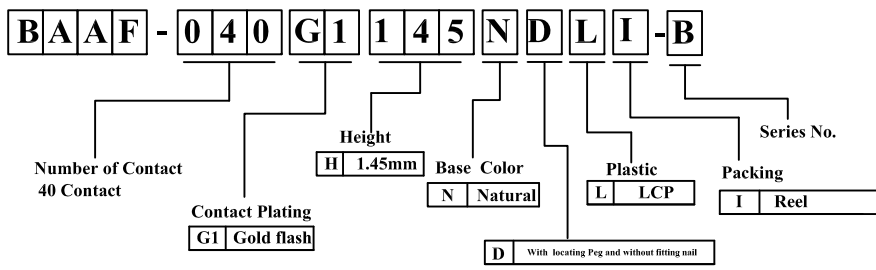

Superior Tech Co., Ltd.			General Tolerance	TITLE	PH0.5 BTOB H1.45 40PIN Female	
			X. ± 0.5	DRAWN	DATE	NO.
			.X ± 0.3	Tom	01-26-13'	002
			.XX ± 0.2	CHECK	DATE	PART NO.
			.XXX ± 0.1	APPROVED	DATE	BAAF-040G1145NDLI-B
REV. A	UNIT mm	SCALE 1:1	Angle ± 5°	CUSTOMER NO.		