




Mating with:
"BAAH-XXXG1301NOLI-B"



SECTION A-A




Mating Height Drawing

REV.	DESCRIPTION	DATE
A	New Drawing	2012/11/22
B	增加Mylar	2013/3/04

NOTE:


- MATERIAL:
HOUSING: LCP+30%GF (halogen free), UL 94V-0, NATURAL COLOR.
CONTACTS: Brass C2680
MYLAR: PI
- FINISH:
CONTACTS: GOLD SHALL BE PLATED ON G/F [1μ^m MIN] ON CONTACT AREA G/F [1μ^m MIN] ON SOLDER TAIL OVER NICKEL [50μ^m ~100μ^m] UNDER-PLATING

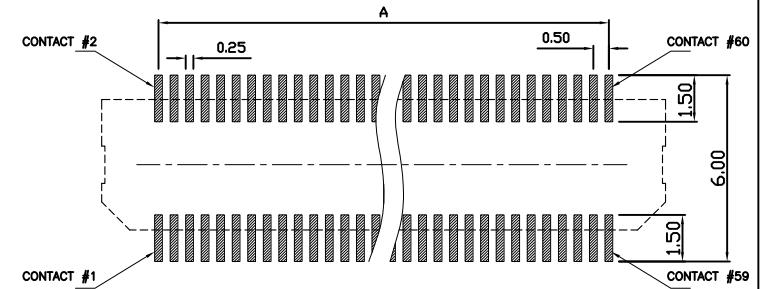

▨ : STAND OFF AREA
TOLERANCE: ±0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)

RoHS compliant & halogen free

B B A H - X X X G 1 0 9 5 N O L F - B

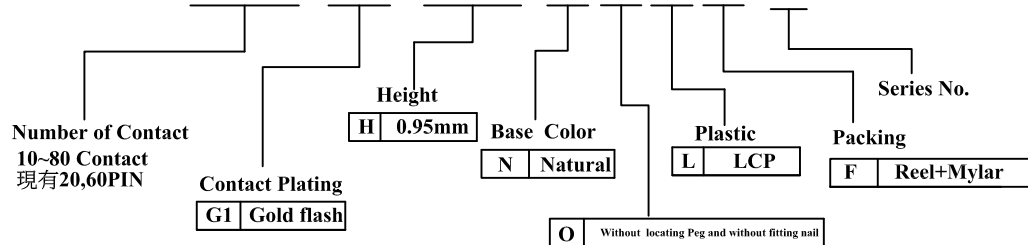

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	PH0.5 BTOB H0.95 公座成品圖	
X. ± 0.5		DRAWN	DATE	DWG. NO.
.X ± 0.3		王小龍	3-04-13'	002
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		APPROVED	DATE	BBAH-XXXG1095NOLF-B
角度	± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
B	mm	1:1	