




Mating with:
"BAAH-XXXG1350NOLF-B"



SECTION A-A




Mating Height Drawing

REV.	DESCRIPTION	DATE
A	New Drawing	2012/11/22
B	增加Mylar	2013/3/04

NOTE:

- MATERIAL:
HOUSING: LCP+30%GF (halogen free), UL 94V-0, NATURAL COLOR.
CONTACTS: Brass C2680
MYLAR: PI
- FINISH:
CONTACTS: GOLD SHALL BE PLATED ON G/F [1μ" MIN] ON CONTACT AREA G/F [1μ" MIN] ON SOLDER TAIL OVER NICKEL [50μ" ~100μ"] UNDER-PLATING

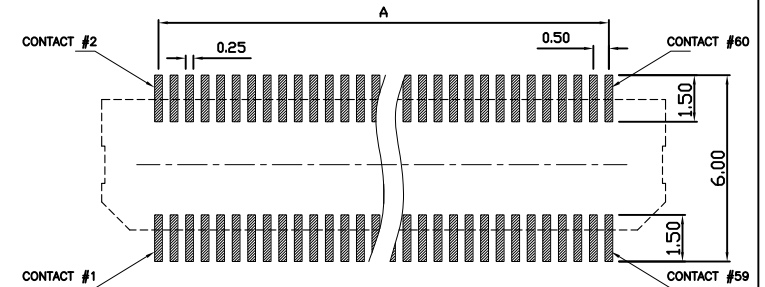

▨ : STAND OFF AREA
TOLERANCE: ±0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)

RoHS compliant & halogen free

B	B	A	H	-	X	X	X	G	1	0	9	5	N	O	L	F	-	B
Number of Contact 10~80 Contact 現有20,60PIN				Contact Plating G1 Gold flash		Height H 0.95mm		Base Color N Natural		Plastic L LCP		Packing F Reel+Mylar		Series No.		O Without locating Peg and without fitting nail		

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		PH0.5 BTOB H0.95 公座成品圖	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		王小龍		3-04-13'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		APPROVED		DATE	
角度 ± 5°		DWG. NO.		002	
		PART NO.		BBAH-XXXG1095NOLF-B	
		CUSTOMER NO.			

REV.	UNIT	SCALE	
B	mm	1:1	