

| REV. | DESCRIPTION | DATE |
|------|-------------|------------|
| A | New Drawing | 2019/03/07 |

Specifications:

Current Rating:1.5A AC/DC

Voltage Rating:230V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:500V AC/minute





Operating Temperature Range:-40°C ~ +105°C

Material and Finish



Insulator:High Temp. Plastic (UL94V-0)

Contact:Phosphor Bronze

Finish:Tin Plated

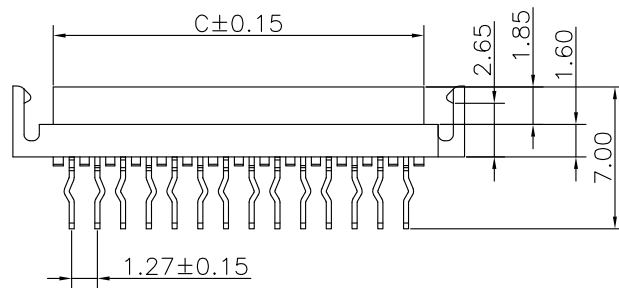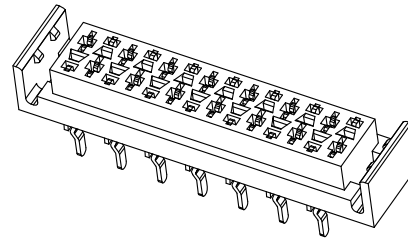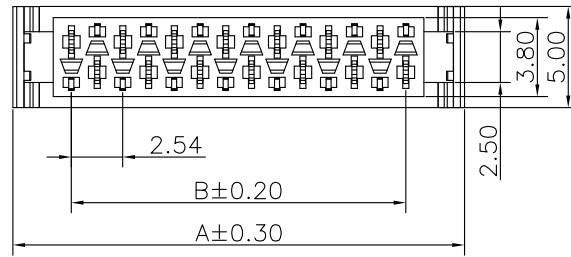

| Pos | A | B | C | Pos | A | B | C |
|-----|-------|-------|-------|-----|-------|-------|-------|
| 4 | 9.70 | 3.81 | 5.60 | 16 | 24.94 | 19.05 | 20.84 |
| 6 | 12.24 | 6.35 | 8.14 | 18 | 27.48 | 21.59 | 23.38 |
| 8 | 14.78 | 8.89 | 10.68 | 20 | 30.02 | 24.13 | 25.92 |
| 10 | 17.32 | 11.43 | 13.22 | 22 | 32.56 | 26.67 | 28.46 |
| 12 | 19.86 | 13.97 | 15.76 | 24 | 35.10 | 29.21 | 31.00 |
| 14 | 22.40 | 16.51 | 18.30 | 26 | 37.64 | 31.75 | 33.54 |

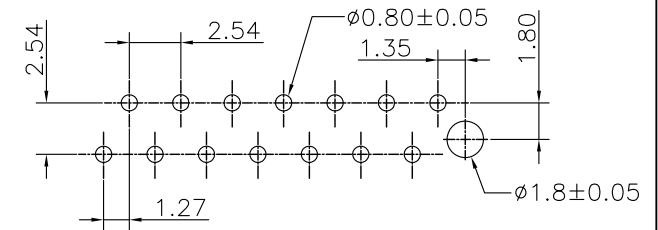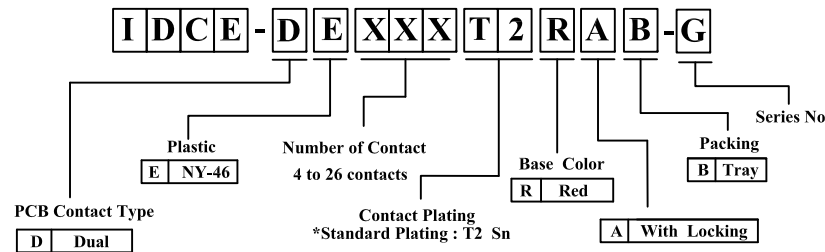

PCB Layout

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

X. ± 0.5

.X ± 0.3

.XX ± 0.2

.XXX ± 0.1

角度 ± 5°

TITLE

DRAWN

ANNIE

CHECK

APPROVED

TOM

IDC SOCKET Micro Match 180° TYPE *Tray

DATE

03-07-19'

DATE

03-07-19'

DATE

03-07-19'

NO.

T230

PART NO.

IDCE-DEXXXT2RAB-G

CUSTOMER NO.

REV.

A

UNIT

mm

SCALE

4:1

