


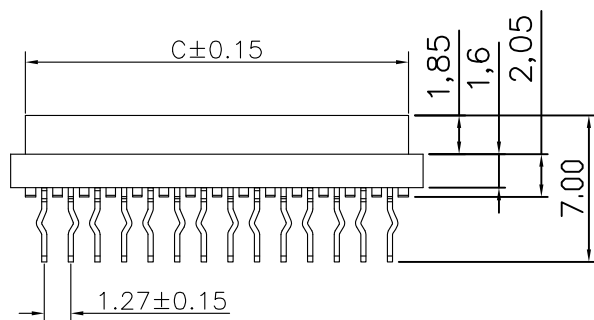

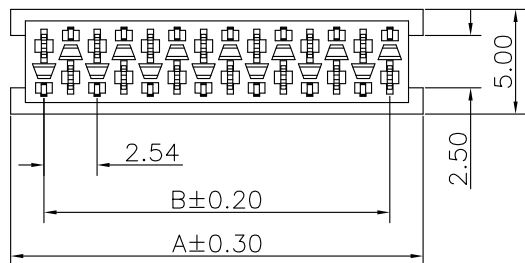


REV.	DESCRIPTION	DATE
A	New Drawing	2019/04/29

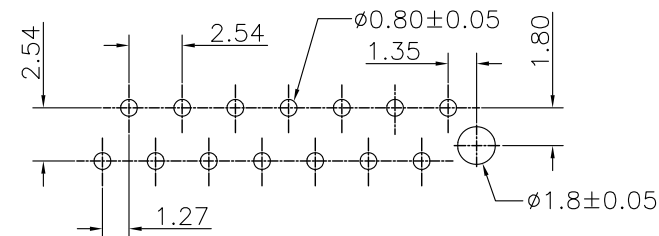

Specifications:
 Current Rating:1.5A AC/DC
 Voltage Rating:230V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material and Finish
 Insulator:High Temp. Plastic (UL94V-0)
 Contact:Phosphor Bronze
 Finish:Tin Plated

Pos	A	B	C	Pos	A	B	C
4	7.00	3.81	5.60	16	22.24	19.05	20.84
6	9.54	6.35	8.14	18	24.78	21.59	23.38
8	12.08	8.89	10.68	20	27.32	24.13	25.92
10	14.62	11.43	13.22	22	29.86	26.67	28.46
12	17.16	13.97	15.76	24	32.40	29.21	31.00
14	19.70	16.51	18.30	26	34.94	31.75	33.54

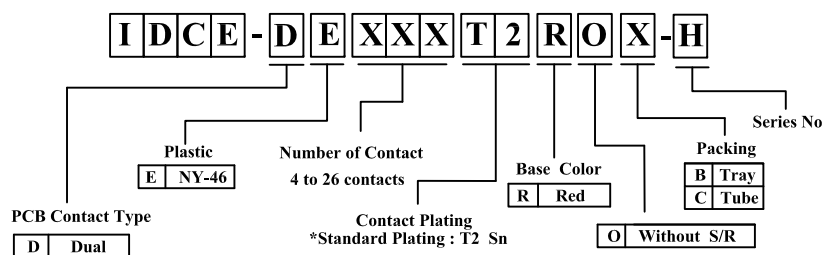

PCB Layout

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	IDC SOCKET Micro Match 180° TYPE *Tray	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Annie	04-24-19'	T230
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		Annie	04-24-19'	IDCE-DEXXXT2ROX-H
角度	± 5°	APPROVED	DATE	CUSTOMER NO.
		Tom	04-24-19'	

REV.	UNIT	SCALE	
A	mm	1:1	