
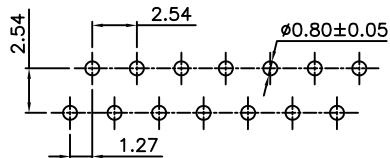

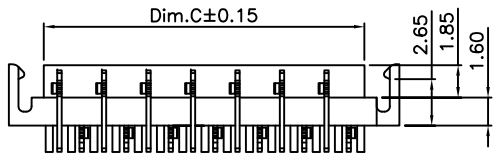


REV.	DESCRIPTION	DATE
A	New Drawing	2023/06/19

Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:30V AC, DC
 Contact tesistance:20m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 500V AC/minute
 Operating Temperature:-40°C ~ +105°C


Materials:
 Insulator:Nylon 9T(UL94V-0)
 Contact material:Phosphor Bronze
 Finish:Tin Plated

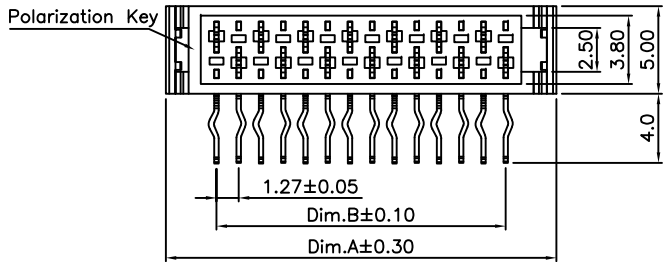

PCB Layout

Pos	Dim.A	Dim.B	Dim.C	Pos	Dim.A	Dim.B	Dim.C
4	9.70	3.81	5.60	16	24.94	19.05	20.84
6	12.24	6.35	8.14	18	27.48	21.59	23.38
8	14.78	8.89	10.68	20	30.02	24.13	25.92
10	17.32	11.43	13.22	22	32.56	26.67	28.46
12	19.86	13.97	15.76	24	35.10	29.21	31.00
14	22.40	16.51	18.30	26	37.64	31.75	33.54

I D C E - D B X X X T 2 R O C - A 0 3

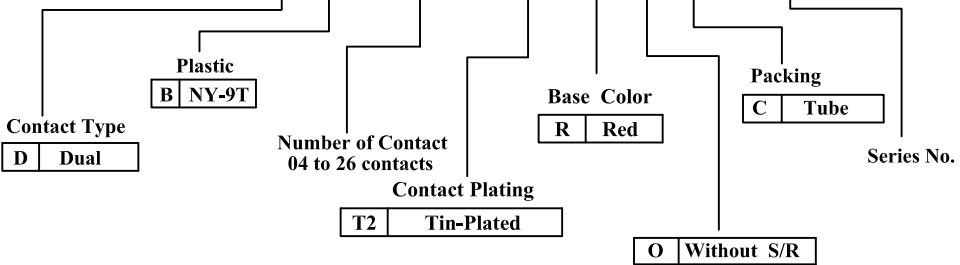

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		PH2.54mm Micro Match Right Angle	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		Jacky		06-19-23'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		Tom		06-19-23'	
APPROVED		DATE		PART NO.	
Tom		06-19-23'		IDCE-DBXXXT2ROC-A03	
角度 ± 5°		CUSTOMER NO.			

REV.	UNIT	SCALE	
A	mm	1:1	