

P.C.B. LAYOUT

REV.	DESCRIPTION	DATE
A	New Drawing	2020/03/10
B	修正外形尺寸	2021/01/25

Technical Data:

Material:

Solder Pin: Copper Alloy, Tin plated

Metal nut: Copper Alloy

Insulator body(housing): Polyamide
(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16A


Withstanding Voltage: AC 2500V(1min)

Mechanical:

Using temperature Range: -40°C to +105°C

Soldering temperature: +250°C, 5seconds Max.

Ordering Information:

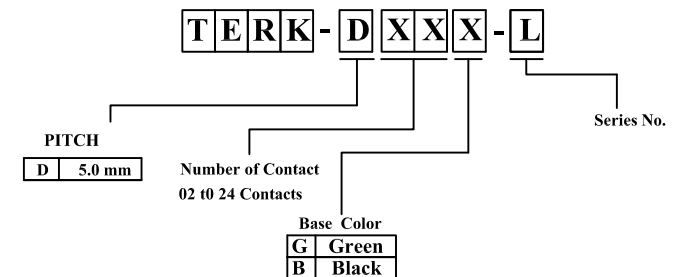

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	端子台 TERMINAL BLOCK PH 5.0	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Tom	01-25-21'	T149
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		APPROVED	DATE	TERK-DXXX-L
角度	± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
B	mm	1:1	