



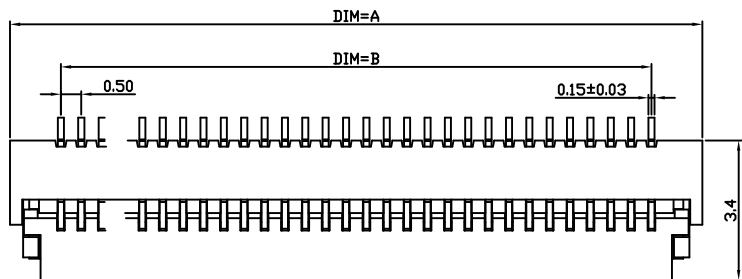
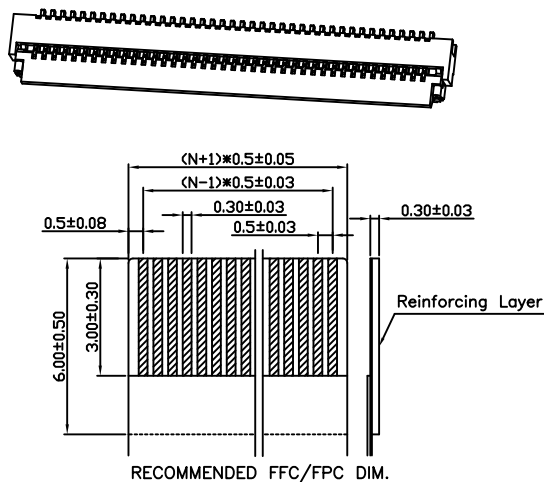


REV.	DESCRIPTION	DATE
A	New Drawing	2018/03/12

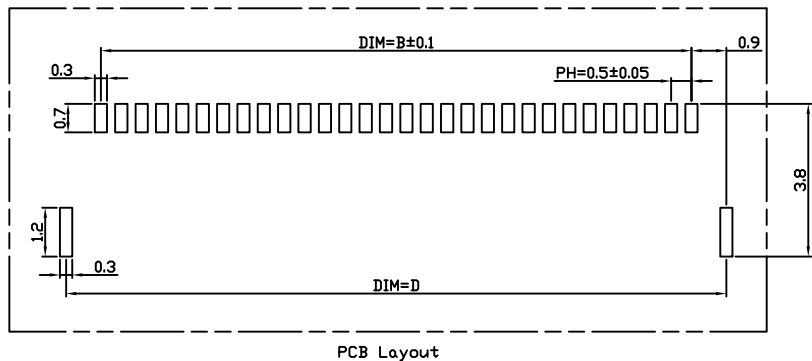

Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 200V AC/Minute
 Contact Resistance: ≤ 20mΩ
 Insulation resistance: ≥ 500MΩ
 Relative Humidity: 93%+40°C

Material Description:
 Terminal: Phosphor Bronze Tin-Leadplated
 Fitting Nail: Brass Tin-plated
 Housing: Thermoplastic(UL94V-0)
 Slider: Thermoplastic(UL94V-0)

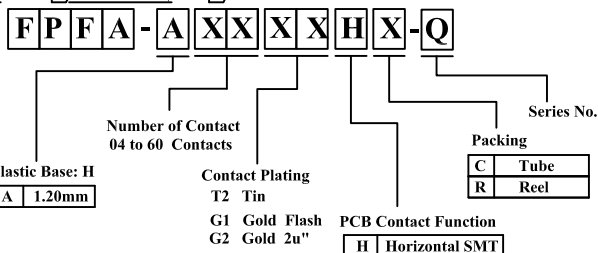

PIN数	DIM-A	DIM-B	DIM-C	DIM-D
4P	4.0	1.50	2.6	3.2
5P	4.5	2.00	3.1	3.7
6P	5.0	2.50	3.6	4.2
7P	5.5	3.00	4.1	4.7
8P	6.0	3.50	4.6	5.2
9P	6.5	4.00	5.1	5.7
10P	7.0	4.50	5.6	6.2
11P	7.5	5.00	6.1	6.7
12P	8.0	5.50	6.6	7.2
13P	8.5	6.00	7.1	7.7
14P	9.0	6.50	7.6	8.2
15P	9.5	7.00	8.1	8.7
16P	10.0	7.50	8.6	9.2
17P	10.5	8.00	9.1	9.7
18P	11.0	8.50	9.6	10.2
19P	11.5	9.00	10.1	10.7
20P	12.0	9.50	10.6	11.2
21P	12.5	10.00	11.1	11.7
22P	13.0	10.50	11.6	12.2
23P	13.5	11.00	12.1	12.7
24P	14.0	11.50	12.6	13.2
25P	14.5	12.00	13.1	13.7
26P	15.0	12.50	13.6	14.2
27P	15.5	13.00	14.1	14.7
28P	16.0	13.50	14.6	15.2
29P	16.5	14.00	15.1	15.7
30P	17.0	14.50	15.6	16.2
31P	17.5	15.00	16.1	16.7
32P	18.0	15.50	16.6	17.2
33P	18.5	16.00	17.1	17.7
34P	19.0	16.50	17.6	18.2
35P	19.5	17.00	18.1	18.7
36P	20.0	17.50	18.6	19.2
37P	20.5	18.00	19.1	19.7
38P	21.0	18.50	19.6	20.2
39P	21.5	19.00	20.1	20.7
40P	22.0	19.50	20.6	21.2
41P	22.5	20.00	21.1	21.7
42P	23.0	20.50	21.6	22.2
43P	23.5	21.00	22.1	22.7
44P	24.0	21.50	22.6	23.2
45P	24.5	22.00	23.1	23.7
46P	25.0	22.50	23.6	24.2
47P	25.5	23.00	24.1	24.7
48P	26.0	23.50	24.6	25.2
49P	26.5	24.00	25.1	25.7
50P	27.0	24.50	25.6	26.2
51P	27.5	25.00	26.1	26.7
52P	28.0	25.50	26.6	27.2
53P	28.5	26.00	27.1	27.7
54P	29.0	26.50	27.6	28.2
55P	29.5	27.00	28.1	28.7
56P	30.0	27.50	28.6	29.2
57P	30.5	28.00	29.1	29.7
58P	31.0	28.50	29.6	30.2
59P	31.5	29.00	30.1	30.7
60P	32.0	29.50	30.6	31.2

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		FPC 0.5 CONNECTOR H1.2	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		Andy		03-12-18'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		APPROVED		DATE	
角度	± 5°			NO. D081	
				PART NO. FPFA-AXXXHX-Q	
				CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	1:1	