

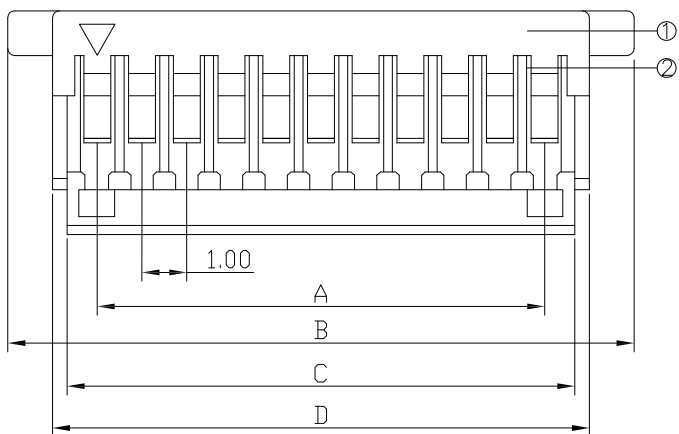


REV.	DESCRIPTION	DATE
A0	New Drawing	2008/08/13
B	更改比例及料號	2021/07/06

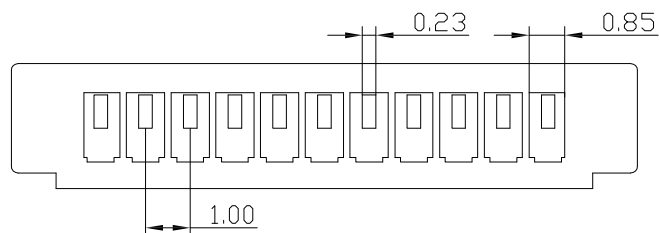

### SPECIFICATIONS

#### Electrical

Current Rating: 1A AC, DC  
Voltage Rating: 50V AC/ max.  
Operating Temp.: -25°C ~ +85°C  
Insulation Resistance: 100MΩ/ min.  
Dielectric Withstanding Voltage: 500V AC/ min.  
Contact Resistance: 20MΩ/ max.


#### Material

Material: PBT, UL94V-0

B 尺寸公差如下：  
2P~10P±0.10mm  
11P~20P±0.20mm

**Housing:WRAA-H100XXXNPA-C**

**Contact:CU-PT2-C**

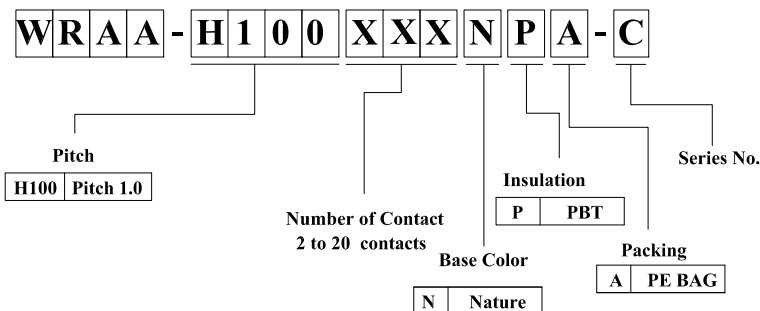

Poles	Dimension mm (in.)				Note.
	A	B	C	D	
2	1.0	5.0	2.37	3.00	
3	2.0	6.0	3.37	4.00	
4	3.0	7.0	4.37	5.00	
5	4.0	8.0	5.37	6.00	
6	5.0	9.0	6.37	7.00	
7	6.0	10.0	7.37	8.00	
8	7.0	11.0	8.37	9.00	
9	8.0	12.0	9.37	10.00	
10	9.0	13.0	10.37	11.00	
11	10.0	14.0	11.37	12.00	
12	11.0	15.0	12.37	13.00	
13	12.0	16.0	13.37	14.00	
14	13.0	17.0	14.37	15.00	
15	14.0	18.0	15.37	16.00	
16	15.0	19.0	16.37	17.00	
17	16.0	20.0	17.37	18.00	
18	17.0	21.0	18.37	19.00	
19	18.0	22.0	19.37	20.00	
20	19.0	23.0	20.37	21.00	

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE	Wafer PH1.0 Housing	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Jacky	07-06-21'	T003
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	Tom	07-06-21'	WRAA-H100XXXNPA-C
角度 ± 5°	APPROVED	DATE	CUSTOMER NO.
	Joe	07-06-21'	

REV.	UNIT	SCALE	
B	mm	1:1	