

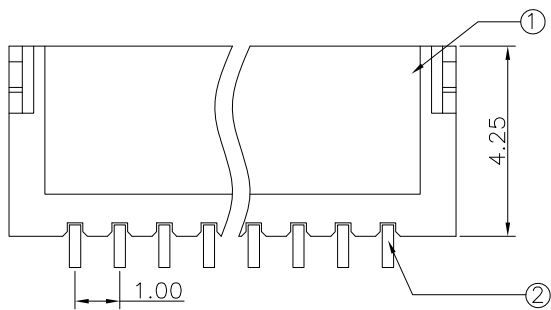


REV.	DESCRIPTION	DATE
A0	New Drawing	2009/09/10
B	塑膠變為無鹵/電鍍變為T3	2015/01/13

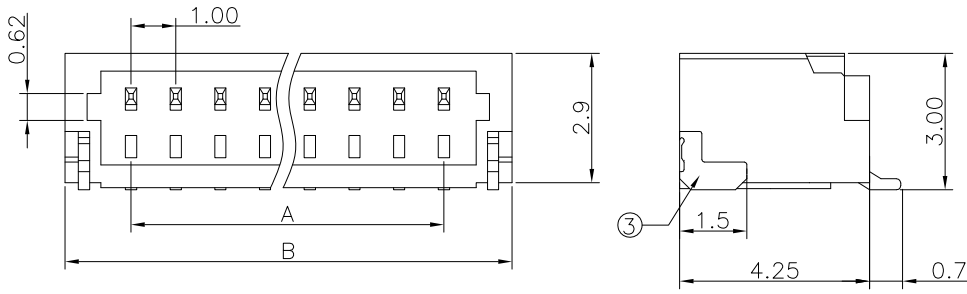


LTR	Part Name	Material	Description	QTY
1	Housing	HTN UL94V-0	Initial : 100M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.0A Voltage Rating : 50V(AC) Initial : 20m Ohms Max.	XX
3	Tab Solder	Brass	Tin-Plated	2

Temperature Rating : -40°C ~ +105°C .
Dielectric Withstanding Voltage : 500V AC/Min

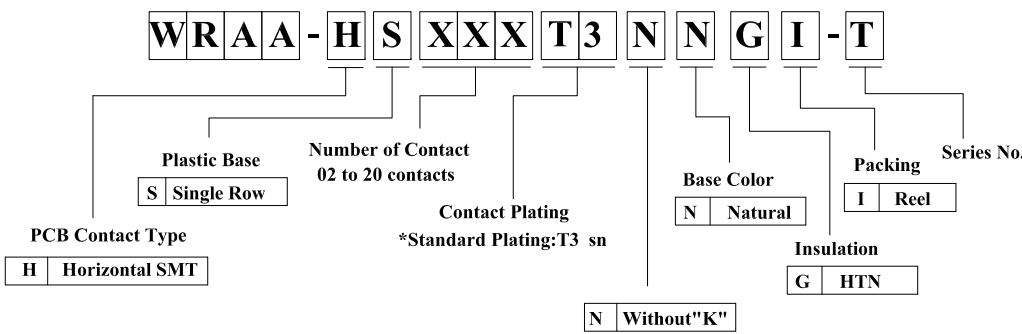

Poles	Dimension mm (in.)	
	A	B
2	1.0(0.039)	4.0(0.157)
3	2.0(0.079)	5.0(0.197)
4	3.0(0.118)	6.0(0.236)
5	4.0(0.157)	7.0(0.276)
6	5.0(0.197)	8.0(0.315)
7	6.0(0.236)	9.0(0.354)
8	7.0(0.276)	10.0(0.394)
9	8.0(0.315)	11.0(0.433)
10	9.0(0.354)	12.0(0.472)
11	10.0(0.394)	13.0(0.512)
12	11.0(0.433)	14.0(0.551)
13	12.0(0.472)	15.0(0.591)
14	13.0(0.512)	16.0(0.630)
15	14.0(0.551)	17.0(0.669)
16	15.0(0.590)	18.0(0.708)
20	19.0(0.748)	22.0(0.866)

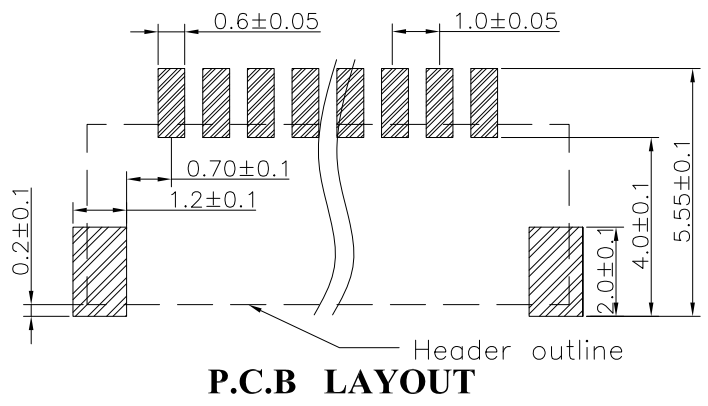

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		WAFER P1.0 90度 SMT 無鹵	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		Zhanghonglan		01-13-15'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		APPROVED		DATE	
角度 ± 5°				NO. T051	
				PART NO. WRAA-HSXXXT3NNGI-T	
				CUSTOMER NO.	

REV.	UNIT	SCALE	
B	mm	4:1	