


REV.	DESCRIPTION	DATE
A0	New Drawing	2009/03/06
B	增加尺寸	2010/04/12
C	塑膠變為6T無鹵料/T2變為T3	2015/01/13


LTR	Part Name	Material	Description	QTY
1	Housing	HTN UL94V-0	Initial : 100M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max.	xx

Temperature Rating : -25°C ~ +85°C .
Dielectric Withstanding Voltage : 250V AC/Min

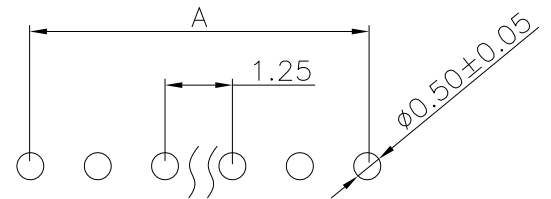

P.C.B LAYOUT

CKT.	A	B	C
2	1.25	3.15	4.25
3	2.50	4.40	5.50
4	3.75	5.65	6.75
5	5.00	6.90	8.00
6	6.25	8.15	9.25
7	7.50	9.40	10.50
8	8.75	10.65	11.75
9	10.00	11.90	13.00
10	11.25	13.15	14.25
11	12.50	14.40	15.50
12	13.75	15.65	16.75
13	15.00	16.90	18.00
14	16.25	18.15	19.25
15	17.50	19.40	20.50

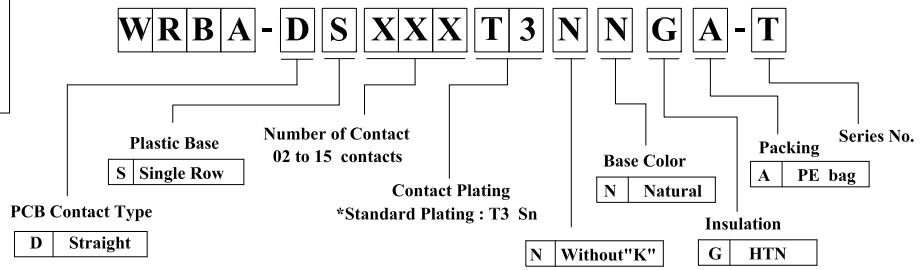

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance X. ± 0.5 .X ± 0.3 .XX ± 0.2 .XXX ± 0.1 角度 ± 5°	TITLE	WAFER PH1.25 180° DIP 無鹵		
	DRAWN	Zhanghonglan	DATE	01-13-15'
	CHECK		DATE	
	APPROVED		DATE	
			NO.	T051
		PART NO.	WRBA-DSXXXT3NNGA-T	
		CUSTOMER NO.		

REV.	UNIT	SCALE	
C	mm	1:1	