


**P.C.B LAYOUT**

CKT.	A	B	C
2	1.25	3.15	4.25
3	2.50	4.40	5.50
4	3.75	5.65	6.75
5	5.00	6.90	8.00
6	6.25	8.15	9.25
7	7.50	9.40	10.50
8	8.75	10.65	11.75
9	10.00	11.90	13.00
10	11.25	13.15	14.25
11	12.50	14.40	15.50
12	13.75	15.65	16.75
13	15.00	16.90	18.00
14	16.25	18.15	19.25
15	17.50	19.40	20.50

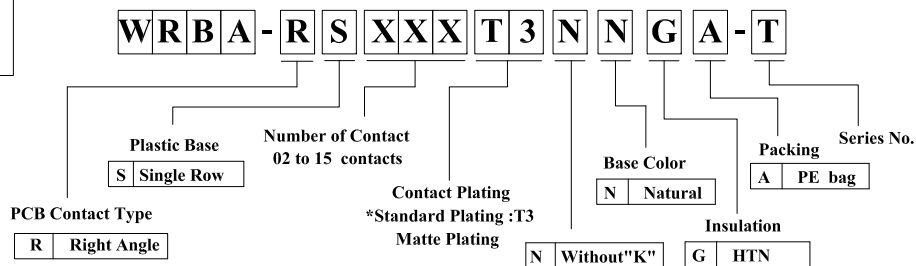

REV.	DESCRIPTION	DATE
A0	New Drawing	2009/10/08

LTR	Part Name	Material	Description	QTY
1	Housing	HTN (高溫尼龍) UL94V-0	Initial : 500M Ohms Min. Halogen Free	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max.	xx

Temperature Rating : -25°C ~ +85°C .  
Dielectric Withstanding Voltage : 500V AC/Min

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE			WAFER PH1.25 90° DIP(型號: HTN FK52G30NH)	
X. ± 0.5	DRAWN		DATE	NO.	
.X ± 0.3	YINBO		10-08-09'	T051	
.XX ± 0.2	CHECK		DATE	PART NO.	
.XXX ± 0.1	APPROVED		DATE	WRBA-RSXXXT3NNGA-T	
角度 ± 5°				CUSTOMER NO.	

REV.	UNIT	SCALE	
A0	mm	2:1	