





REV.	DESCRIPTION	DATE
A0	New Drawing	2009/06/19

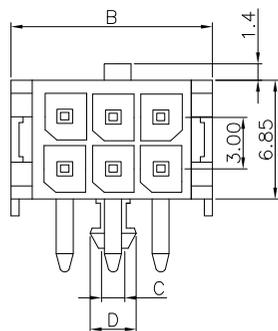


Poles	Dimension (mm)			
	A	B	C	D
2		6.65		
4	3.00	9.65		
6	6.00	12.65		
8	9.00	15.65	6.0	8.0
10	12.00	18.65	9.0	11.0
12	15.00	21.65	12.0	14.0
14	18.00	24.65	15.0	17.0
16	21.00	27.65	18.0	20.0
18	24.00	30.65	21.0	23.0
20	27.00	33.65	24.0	26.0
22	30.00	36.65	27.0	29.0
24	33.00	39.65	30.0	32.0

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	Initial : 1000M Ohms Min.	1
2	Contact	Brass	Current Rating : 5.0A Initial : 10m Ohms Max.	xx


Temperature Rating : -25°C ~ +105°C .
Dielectric Withstanding Voltage : 1500V AC/Min

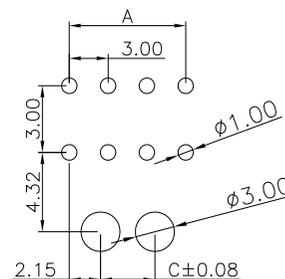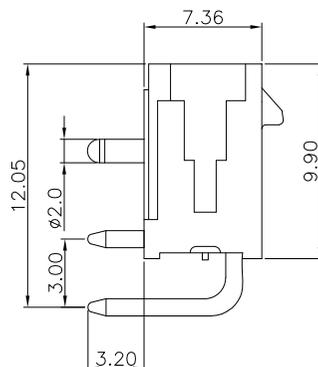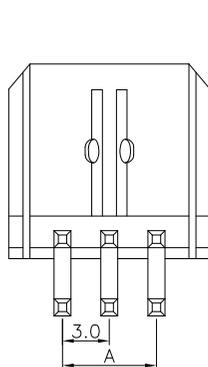


2*4Pin~2*12Pin



2*3Pin




2*2Pin



2*1Pin

P.C.B LAYOUT

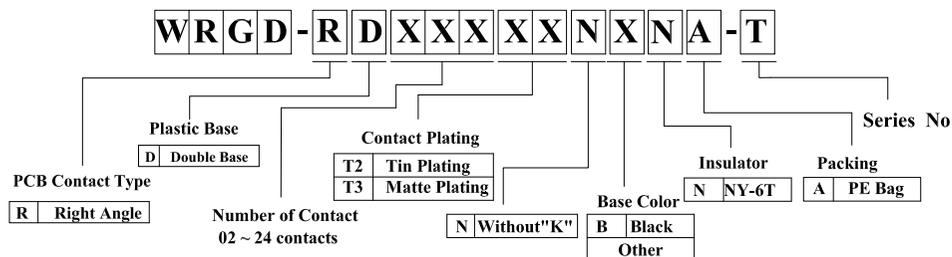


RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	WAFER MICRO FIT3.0mm Dual RowDIP TYPE 90W	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	SUNCUI	06-19-09'	T051
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	WRGD-RDXXXXXXNNA-T
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE
A0	mm	2:1



(Q2-R03-01A) ST-R05-07