

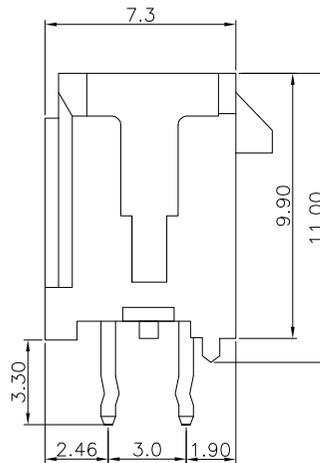
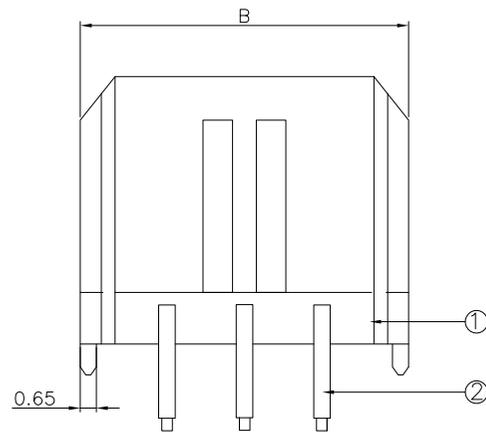


REV.	DESCRIPTION	DATE
A0	New Drawing	2009/06/19

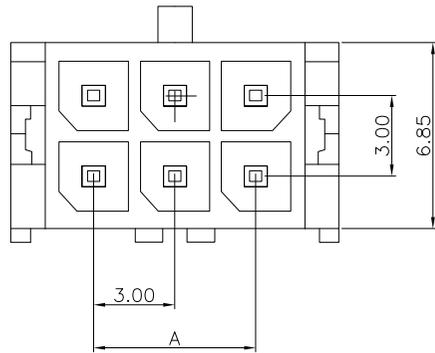


LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	Initial : 1000M Ohms Min.	1
2	Contact	Brass C2600	Current Rating : 5.0A Initial : 10m Ohms Max.	xx

Temperature Rating : -25°C ~ +105°C .
Dielectric Withstanding Voltage : 1500V AC/Min

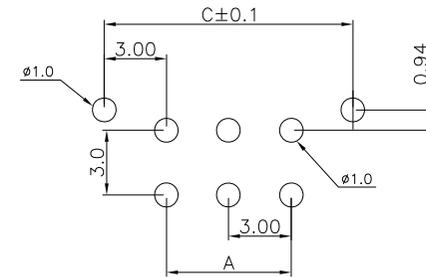

P.C.B LAYOUT

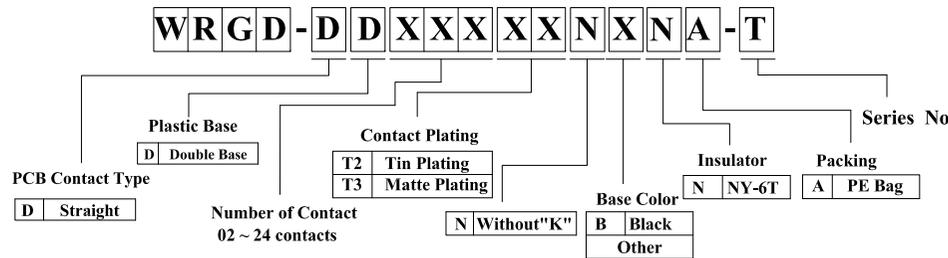

Poles	Dimension mm (in.)	
	A	B
2		6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	WAFER MicroFit DIP TYPE 3.0mm NY-6T	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	SUNCUI	06-19-09'	T051
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	WRGD-DDXXXXXXNNA-T
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE
A0	mm	2:1

