


Poles	Dimension	
	A	B
2	2.54	7.70
3	5.08	10.24
4	7.62	12.78
5	10.16	15.32
6	12.70	17.86
7	15.24	20.40
8	17.78	22.94
9	20.32	25.48
10	22.86	28.02
11	25.40	30.56
12	27.94	33.10
13	30.48	35.64
14	33.02	38.18
15	35.56	40.72
16	38.10	43.26
17	40.64	45.80
18	43.18	48.34
19	45.72	50.88
20	48.26	53.42

REV.	DESCRIPTION	DATE
A	New Drawing	2013/08/15


Material: Post: Brass, Gold Plated/Tin Plated  
 Base: P B T UL94V-0  
 COLOR: BLACK

**SPECIFICATIONS**

Voltage Rating: AC 250V  
 Current Rating: AC DC 3A  
 Withstand Voltage: AC 1000V Min.  
 Insulation Resistance: 1000M ohm Min.  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: Initial Value 10m ohm Max.  
 After Environmental Testing 20m ohm Max.

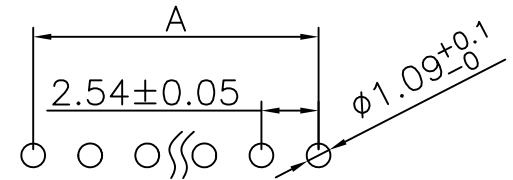

RECOMMENDED PCB THICKNESS 1.6mm

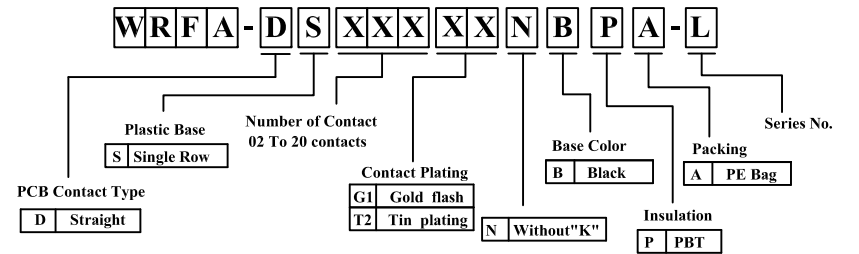

RoHS Compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE		Pitch 2.54mm top entry P C B board connector	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		Zhanghonglan		08-15-13'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		APPROVED		DATE	
角度	± 5°			NO. T085	
				PART NO. WRFA-DSXXXXXXXXNBPA-L	
				CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	1:1	