
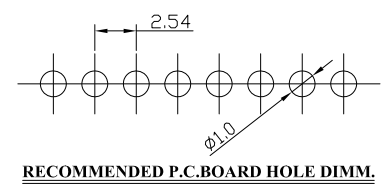
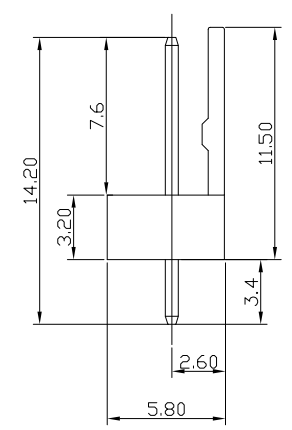
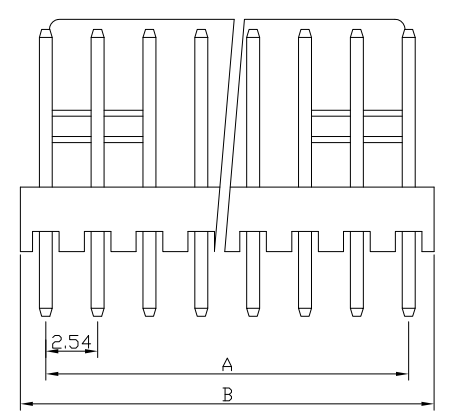



REV.	DESCRIPTION	DATE
A	New Drawing	2018/12/26
B	更改靠背尺寸	2021/09/28

Specifications

Current Rating: 2A AC, DC
Voltage Rating: 250 AC Maximum
Operating Temp: - 25°C~+85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Terminal Material: Brass/ Tin-plated
Material: Nylon 66, UL94V-2

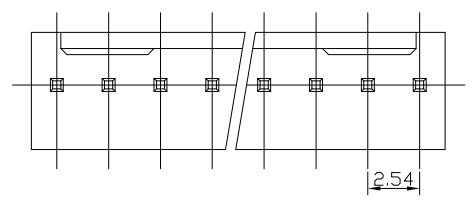

Poles No	Dimension(mm)	
	A	B
2Pin	2.54	5.12
3Pin	5.08	7.66
4Pin	7.62	10.20
5Pin	10.16	12.74
6Pin	12.70	15.30
7Pin	15.24	17.94
8Pin	17.78	20.48
9Pin	20.32	23.02
10Pin	22.86	25.58
11Pin	25.40	28.12
12Pin	27.94	30.68
13Pin	30.48	33.10
14Pin	33.02	35.80
15Pin	35.56	38.34
16Pin	38.10	40.94
17Pin	40.64	43.30
18Pin	43.18	45.90
19Pin	45.72	48.56
20Pin	48.26	50.80

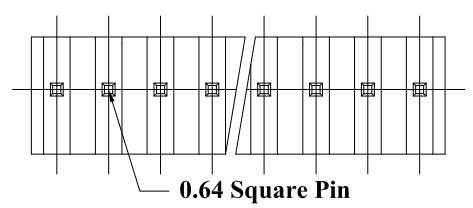

W R F B - D S X X X X X N N A A - T

- W R F B**: Plastic Base
- D**: Number of Contact (02 to 20 contacts)
- S**: PCB Contact Type (Single Row)
- X X X X X**: Contact Plating (T2 Tin Plating, T3 Matte Plating)
- N N**: Base Color (Natural)
- A A**: Packing (PE Bag)
- T**: Series No.
- Insulation**: A NY-66 UL94V-2
- N Without "K"**: Insulation
- D Straight**: PCB Contact Type

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		WAFER PH2.54 靠背式 H11.5 180°系列 UL-94V0	
X. ± 0.5		DRAWN		DATE	NO.
.X ± 0.3		Jacky		09-28-21'	T003
.XX ± 0.2		CHECK		DATE	PART NO.
.XXX ± 0.1		Tom		09-28-21'	WRFB-DSXXXXXXNNAA-T
角度 ± 5°		APPROVED		DATE	CUSTOMER NO.
		Joe		09-28-21'	

REV.	UNIT	SCALE	
B	mm	1:1	