

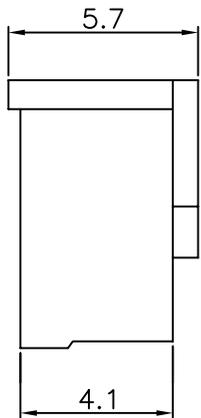


REV.	DESCRIPTION	DATE
A0	New Drawing	2007/3/1

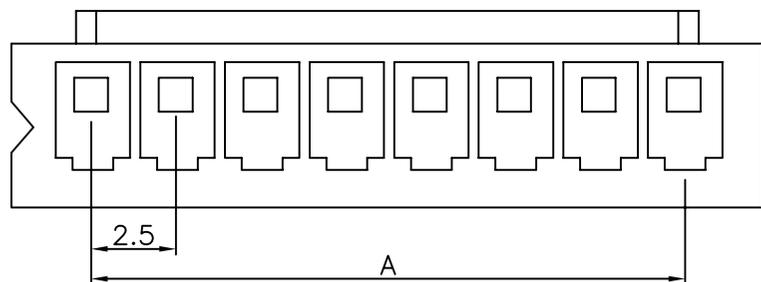

SPECIFICATIONS
 Current rating:2.5A AC,DC
 Voltage rating:250V AC,DC
 Temperature rating:-25°Cto+85°C
 Contact resistance:10mΩ Max.
 Insulation resistance:1000MΩ Min
 Withstanding voltage:800V AC/minute
 Material:Nylon 66,UL94V-0

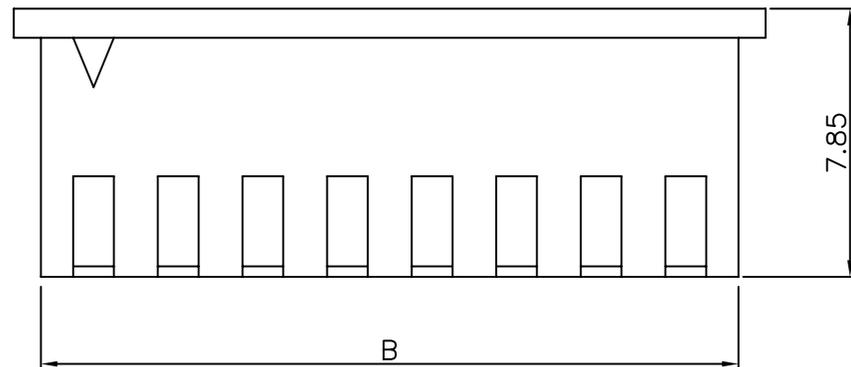

Poles	Dimension mm(in.)	
	A	B
2	2.50(0.098)	5.70((0.224)
3	5.00(0.197)	8.20(0.323)
4	7.50(0.295)	10.70(0.421)
5	10.00(0.394)	13.20(0.520)
6	12.50(0.492)	15.70(0.618)
7	15.00(0.591)	18.20(0.717)
8	17.50(0.689)	20.70(0.815)
9	20.00(0.787)	23.20(0.913)
10	22.50(0.886)	25.70(1.012)
11	25.00(0.984)	28.20(1.110)
12	27.50(1.802)	30.70(1.209)
13	30.00(1.181)	33.20(1.307)
14	32.50(1.280)	35.70(1.406)
15	35.00(1.378)	38.20(1.504)
16	37.50(1.476)	40.70(1.602)
20	47.5(1.870)	50.70(1.996)

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		2.5mm Wire-to-Board Housing	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		YangFeng		07-03-01'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		Hanping		07-03-01'	
角度 ± 5°		APPROVE		DATE	
		YEH		07-03-01'	
		DWG. NO.		2500J-H	
		PART NO.		WREB-H-XX	
		CUSTOMET NO.			

REV.	UNIT	SCALE	
A0	mm	4:1	