
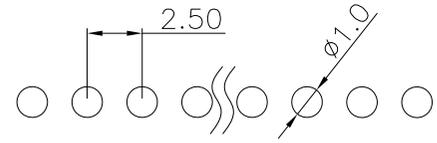
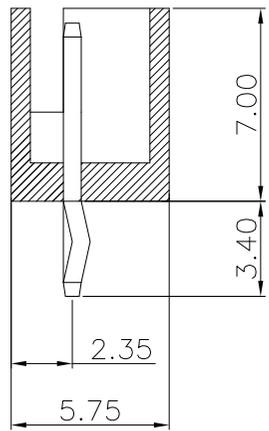
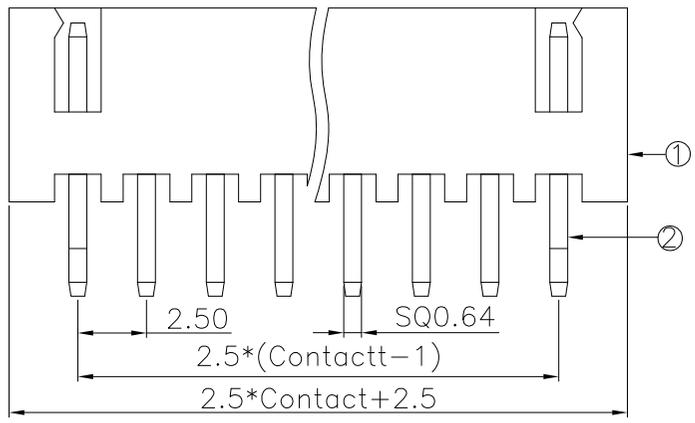



REV.	DESCRIPTION	DATE
A0	New Drawing	2019/01/18

LTR	Part Name	Material	Description	QTY
1	Housing	NY-66 UL94V-0	Initial : 1000M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max.	XX

Temperature Rating : -25°C ~ +85°C .
Dielectric Withstanding Voltage : 500V AC/Min

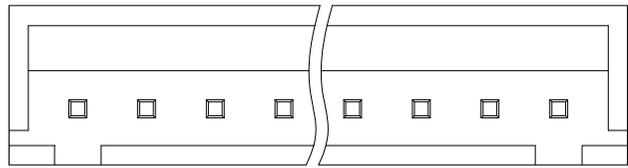

P.C.B LAYOUT

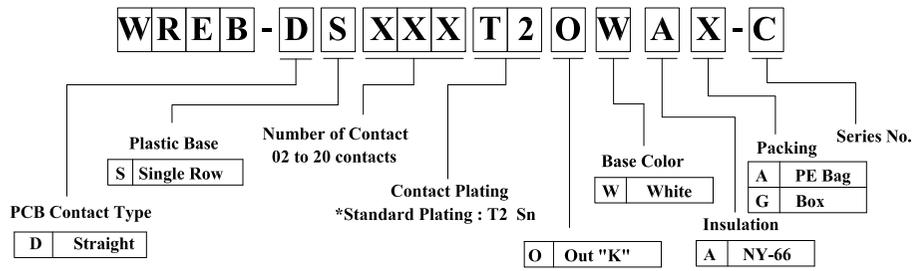

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	2.5mm(0.1") Wafer, Straight Single Row 02 to 20 Contacts	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Annie	01-18-19'	T003
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	Annie	01-18-19'	WREB-DSXXXT2OWAX-C
角度 ± 5°	APPROVED	DATE	CUSTOMER NO.
	Tom	01-18-19'	

REV.	UNIT	SCALE	
A0	mm	2:1	