





REV.	DESCRIPTION	DATE
A	New Drawing	2023/06/20

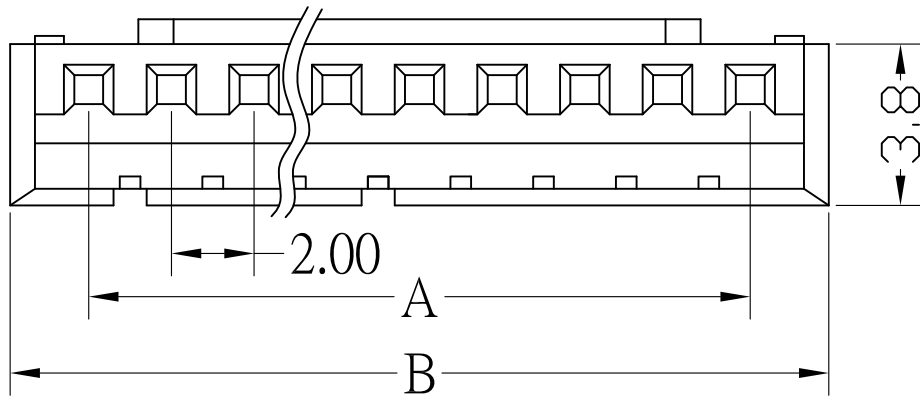

Insulator: Nylon 66 Halogen Free UL 94V-0
 Color: White
 Current Rating: 2A AC/DC
 Voltage Rating: 100V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Withstanding: 800V AC/minute
 Operating Temperature: -25°C ~ 85°C

Wafer:WRDD-DSXXXT2OWAA-B
Wafer:WRDD-RSXXXT2OWAA-B
Wafer:WRDD-SSXXXT2NNBX-B
Wafer:WRDD-HSXXXT2NNBX-B
Housing:WRDD-H200XXXWAA-B
Housing:WRDD-H200XXXWIA-B
Terminal:CU-PT2-B

CIRCUITS	Dim.A	Dim.B
2	2.00	5.6
3	4.00	7.6
4	6.00	9.6
5	8.00	11.6
6	10.00	13.6
7	12.00	15.6
8	14.00	17.6
9	16.00	19.6
10	18.00	21.6
11	20.00	23.6
12	22.00	25.6
13	24.00	27.6
14	26.00	29.6
15	28.00	31.6
16	30.00	33.6

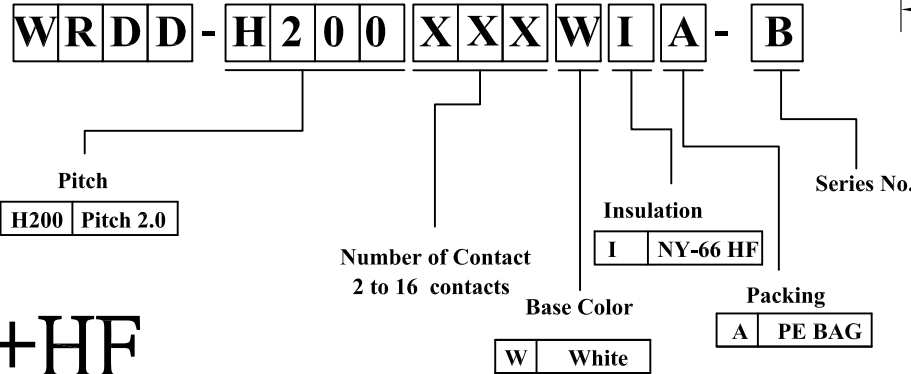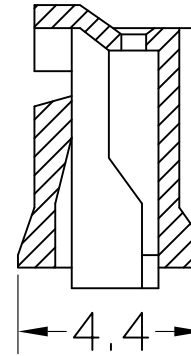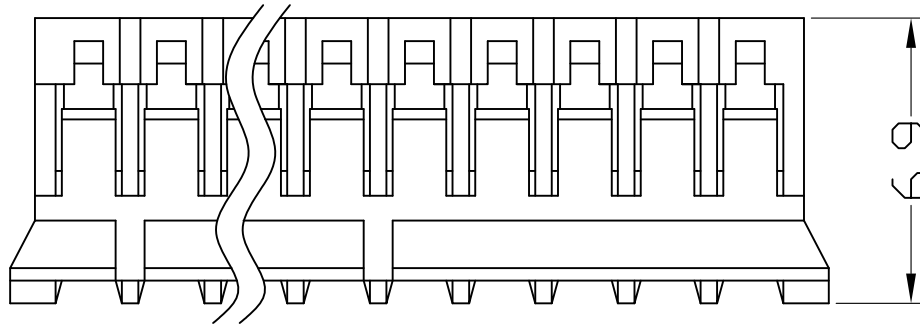

RoHS+HF

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	PH2.0 Housing	
X. ± 0.5		DRAWN Tom	DATE	NO.
.X ± 0.3			06-20-23'	D076
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1				WRDD-H200XXXWIA-B
角度 ± 5°		APPROVED	DATE	CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	