




REV.	DESCRIPTION	DATE
A	New Drawing	2013/07/03
B	更新圖面	2019/04/26

*HOUSING*

Part No: WRFD-H254XXXBPA-L-A0  
Poles: 2-18  
Material: PBT UL94V-0

*SPECIFICATIONS*

Voltage rating: AC 250V  
Current rating: AC,DC,3A  
Withstand voltage: AC 1000 V/min.  
Insulation resistance: 1000 mΩ min.  
Temperature range: -25°C~+85°C  
Applicable PC board thickness: 0.8~1.6mm  
Contact resistance: Initial value/10 mΩ max.  
After environmental Testing/20 mΩ max.

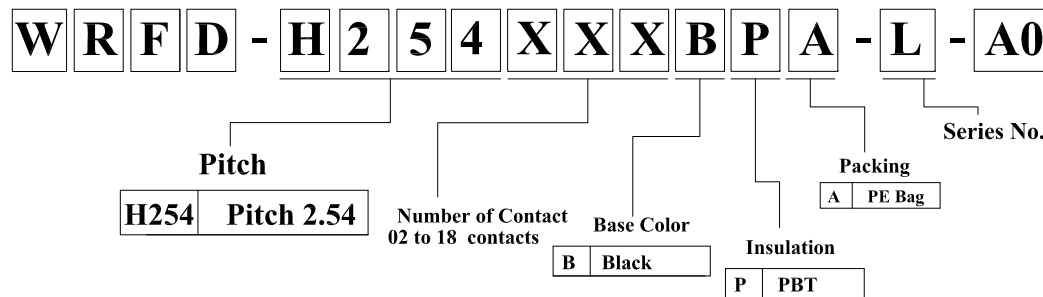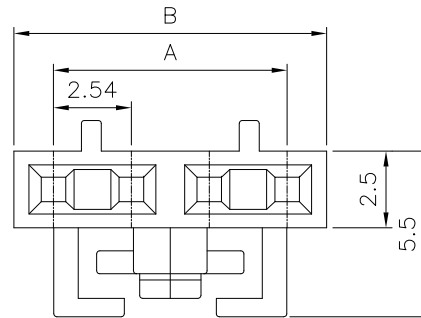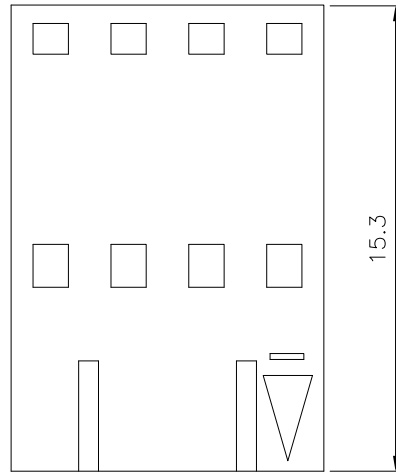

Poles	Dimension in.(mm)		Material
	A	B	
2	0.10( 2.54)	0.21( 5.35)	PBT UL94V-0
3	0.20( 5.08)	0.31( 7.89)	
4	0.30( 7.62)	0.41(10.43)	
5	0.40(10.16)	0.51(12.97)	
6	0.50(12.70)	0.61(15.51)	
7	0.60(15.24)	0.71(18.05)	
8	0.70(17.78)	0.81(20.59)	
9	0.80(20.32)	0.91(23.13)	
10	0.90(22.86)	1.01(25.67)	
11	1.00(25.40)	1.11(28.21)	
12	1.10(27.94)	1.21(30.75)	
13	1.20(30.48)	1.31(33.29)	
14	1.30(33.02)	1.41(35.83)	
15	1.40(35.56)	1.51(38.37)	
16	1.50(38.10)	1.61(40.91)	
17	1.60(40.64)	1.71(43.45)	
18	1.70(43.18)	1.81(45.99)	

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE	Pitch 2.54 housing	
X. ± 0.5	DRAWN Annie	DATE	NO.
.X ± 0.3		04-26-19'	T085
.XX ± 0.2	CHECK Annie	DATE	PART NO.
.XXX ± 0.1		04-26-19'	WRFD-H254XXXBPA-L-A0
角度 ± 5°	APPROVED Tom	DATE	CUSTOMER NO.
		04-26-19'	

REV. B	UNIT mm	SCALE 1:1	
-----------	------------	--------------	--