

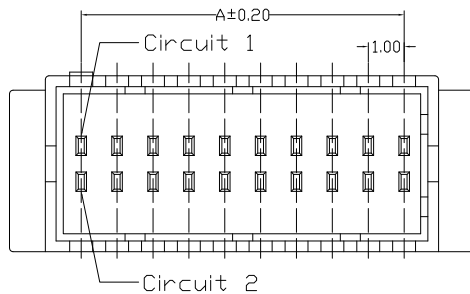




REV.	DESCRIPTION	DATE
A	New Drawing	2018/04/26
B	圖面更新	2023/11/20

NOTE:  
 Current rating:1A AC,DC  
 Voltage rating:50V AC,DC  
 Temperature range:-25°C~+85°C  
 Insulation resistance:100MΩ/Min  
 Withstanding voltage:500V AC/minute  
 Contact resistance:20mΩ/Max

Wafer:WRAN-SDXXXG1NNBI-S  
 Wafer:WRAD-SDXXXG10NBE-C10  
 Housing:WRAN-H100XXXWAA-W-A10  
 Terminal:CU-PXX-C10

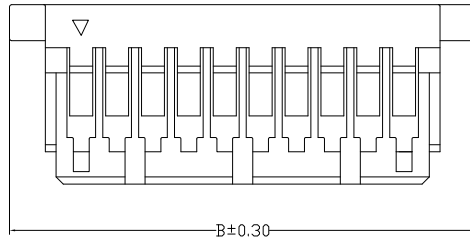

PART NO.	Dimension mm		Q'ty/BAG
	A	B	
10	4.00	8.00	1000PCS
12	5.00	9.00	
14	6.00	10.00	
16	7.00	11.00	
20	9.00	13.00	
30	14.00	18.00	
40	19.00	23.00	
50	24.00	28.00	

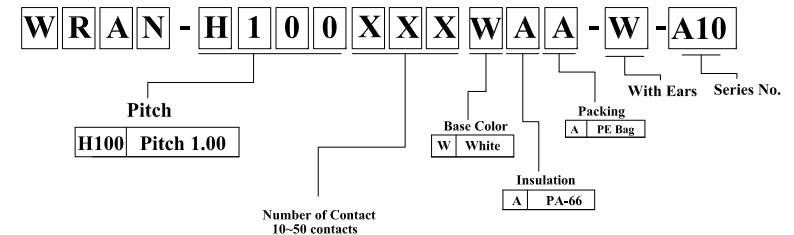

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE	Wafer PH1.0 Dual Rows Housing	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Jacky	11-20-23'	D080
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		Tom	11-20-23'	WRAN-H100XXXWAA-W-A10
角度 ± 5°		APPROVED	DATE	CUSTOMER NO.
		Tom	11-20-23'	

REV.	UNIT	SCALE	
B	mm	4:1	