


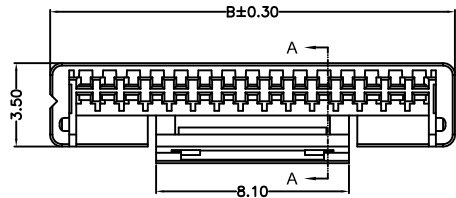
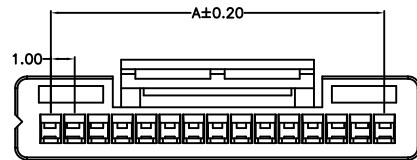


REV.	DESCRIPTION	DATE
A	New Drawing	2022/06/22



SECTION A-A





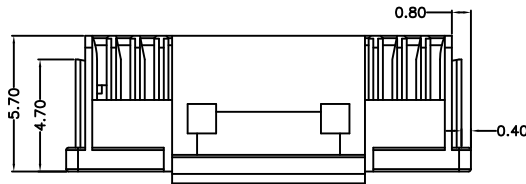


NOTE:
Current rating:1A AC,DC
Voltage rating:50V AC,DC
Temperature range:-25℃~+85℃
Insulation resistance:100MΩ/Min
Withstanding voltage:500V AC/minute
Contact resistance:30mΩ/Max
Poles:2~15Pins

TABLE:

PIN NO.	Dimension mm		Q'ty/BAG
	A	B	
2	2.00	5.00	1000PCS
3	2.00	5.00	1000PCS
4	3.00	6.00	1000PCS
5	4.00	7.00	1000PCS
6	5.00	8.00	1000PCS
7	6.00	9.00	1000PCS
8	7.00	10.00	1000PCS
9	8.00	11.00	1000PCS
10	9.00	12.00	1000PCS
11	10.00	13.00	1000PCS
12	11.00	14.00	1000PCS
13	12.00	15.00	1000PCS
14	13.00	16.00	1000PCS
15	14.00	17.00	1000PCS

Wafer:WRAB-SSXXXT2ONLE-C25-A
Wafer:WRAB-HSXXXT2ONLI-C25-A
Housing:WRAB-H100XXXNAA-C25-A
Terminal:CU-PXX-C25-A

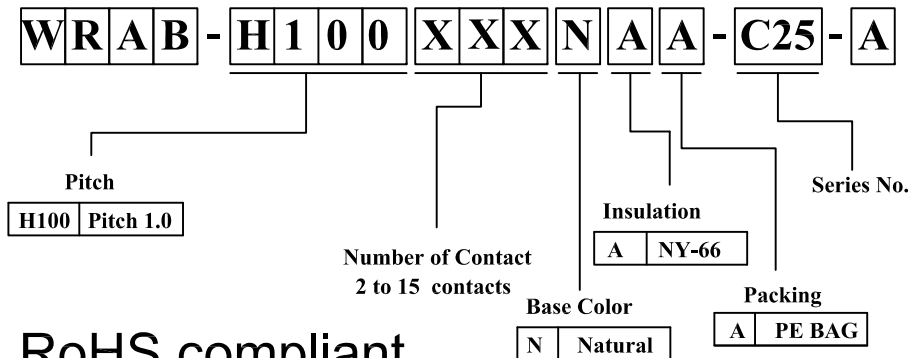

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	PH1.0 Housing	
X.	± 0.5	DRAWN	DATE	NO.
.X	± 0.3	Jacky	06-22-22'	D080
.XX	± 0.2	CHECK	DATE	PART NO.
.XXX	± 0.1	Tom	06-22-22'	WRAB-H100XXXNAA-C25-A
角度	± 5°	APPROVED	DATE	CUSTOMER NO.
		Tom	06-22-22'	

REV.	UNIT	SCALE
A	mm	1:1

