


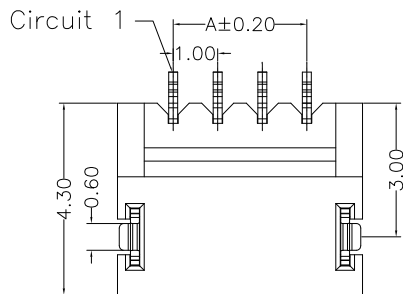


REV.	DESCRIPTION	DATE
A	New Drawing	2023/11/20


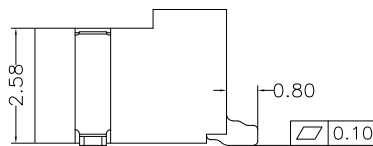


NOTE:  
 Current rating:1A AC,DC  
 Voltage rating:50V AC,DC  
 Temperature range:-25℃~+85℃  
 Insulation resistance:100MΩ/Min  
 Withstanding voltage:500V AC/minute  
 Contact resistance:20mΩ/Max  
 PIN:Brass/Tin-Plated

PART NO.	Dimension mm		Q'ty/Reel
	A	B	
02	1.00	3.50	1500PCS
03	2.00	4.50	
04	3.00	5.50	
05	4.00	6.50	
06	5.00	7.50	
07	6.00	8.50	
08	7.00	9.50	
09	8.00	10.50	
10	9.00	11.50	
11	10.00	12.50	
12	11.00	13.50	
13	12.00	14.50	
14	13.00	15.50	
15	14.00	16.50	
16	15.00	17.50	
17	16.00	18.50	
18	17.00	19.50	
19	18.00	20.50	
20	19.00	21.50	



Wafer:WRAB-SSXXXT2ONNE-A27  
 Wafer:WRAB-HSXXXT2ONNI-A27  
 Housing:WRAB-H100XXXWAA-A27-X  
 Terminal:CU-PXX-A27

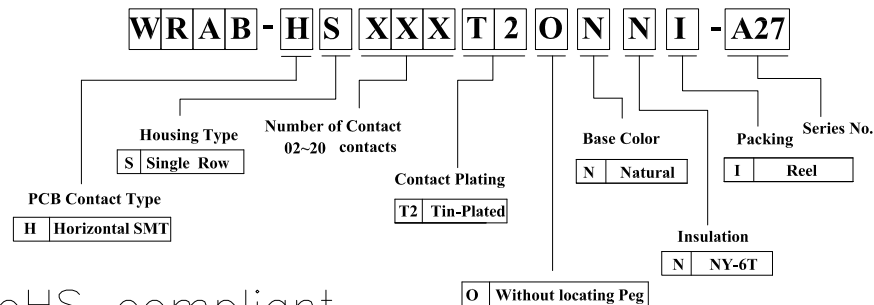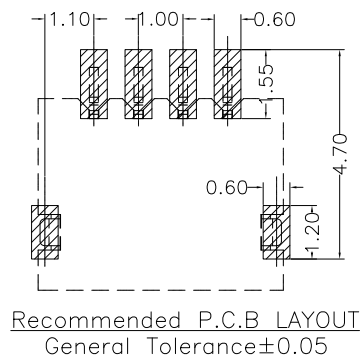

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE	WAFER PH1.0 臥式SMT	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Jacky	11-20-23'	D080
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		Tom	11-20-23'	WRAB-HSXXXT2ONNI-A27
角度 ± 5°		APPROVED	DATE	CUSTOMER NO.
		Tom	11-20-23'	

REV.	UNIT	SCALE	
A	mm	4:1	