

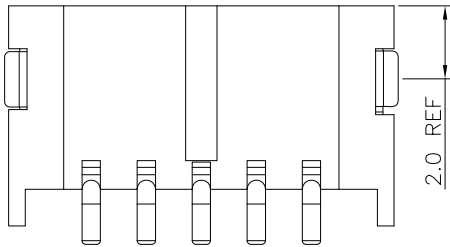



REV.	DESCRIPTION	DATE
A	New Drawing	2012/07/12






4PIN(含4PIN)以上

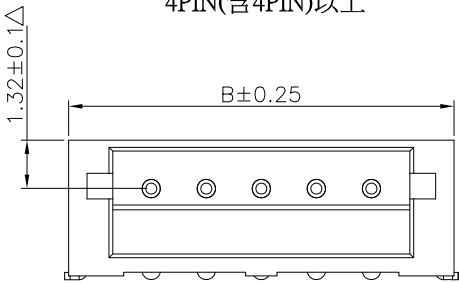

2~3PIN



NO.	Dim. A	Dim. B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	10.50
6	7.50	12.00
7	9.00	13.50
8	10.50	15.00
9	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50

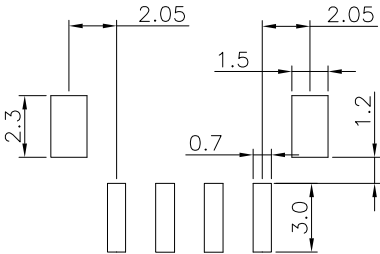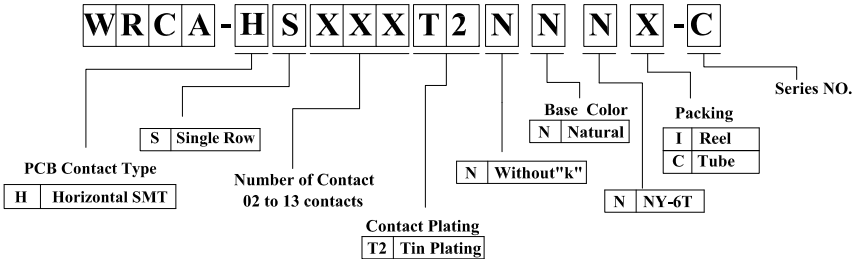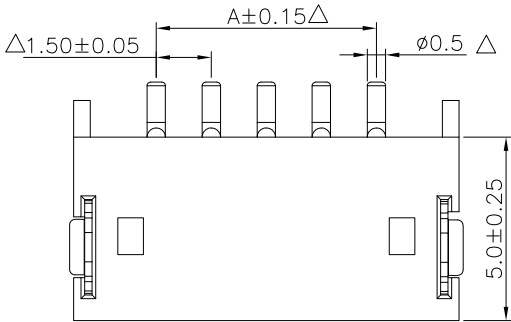

P.C.B Hole Layout

SPECIFICATIONS	
Current rating	:1A AC, DC
Voltage rating	:100V AC, DC
Temperature range	:−25° C~+85° C
Contact resistance	:20mΩMax
Insulation resistance	:500MΩMin
Withstanding voltage	:500 V AC/minute
Finished	:Tin-plated
Housing Material	:Nylon-6T, UL94 V-0
Color	: BEIGE

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance		TITLE	Wafer PH1.5 R/A SMT TYPE 系列 NY-6T UL94-V0	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		YuHongYu	07-12-12'	T003
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		APPROVED	DATE	WRCA-HSXXXT2NNNX-C
角度	± 5°			CUSTOMER NO.

(Q2-R03-01A) ST-R05-07