
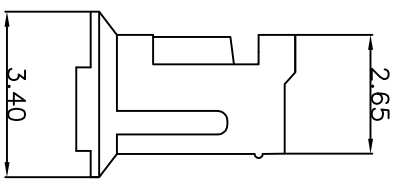
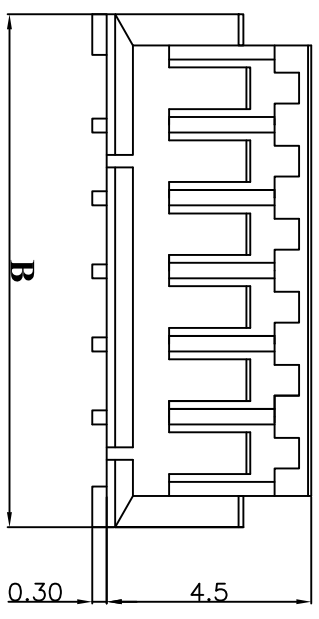


REV.	DESCRIPTION	DATE
A	New Drawing	2011/3/8

**SPECIFICATIONS**

Current rating : 1 A AC,DC  
Voltage rating : 100V AC,DC  
Temperature range : -25°C to +85 °C  
Contact resistance : 20mΩ Max.  
Insulation resistance : 500MΩ Min.  
Withstanding voltage : 500V AC/minute  
Material : Nylon 66, UL94V-0

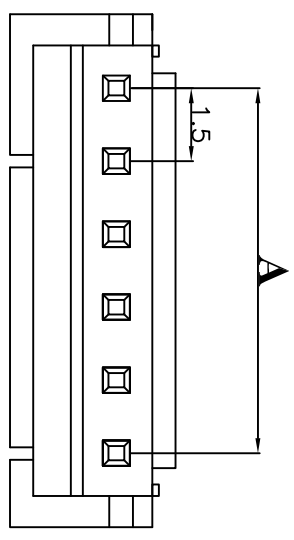


**Dimensions**

Poles	Dimension (mm)	
	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

WRCB-H15XXXA-C

RoHS Compliant

峻豪電子股份有限公司  
**Superior Tech Co., Ltd.**

REV.	UNIT	SCALE		General Tolerance	
				mm	1:1
A					
				TITLE	1.50mm Wire-to-Board Hosing (方型孔)
				DRAWN	YuHongYu
				CHECK	
				APPROVED	
				DATE	2011/3/8
				DATE	
				DWG. NO.	T003
				PART NO.	WRCB-H15XXXA-C
				CUSTOMER NO.	