



REV.	DESCRIPTION	DATE
A	New Drawing	2010/04/13

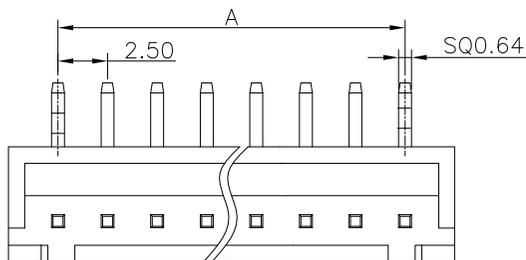


LTR	Part Name	Material	Description	QTY
1	Housing	NY-66 UL94V-0	Initial : 1000M Ohms Min.	1
2	Contact	Brass C2600	Current Rating : 3.0A Initial : 20m Ohms Max.	XX

Temperature Rating : -25°C ~ +85°C .
Dielectric Withstanding Voltage : 800V AC/Min

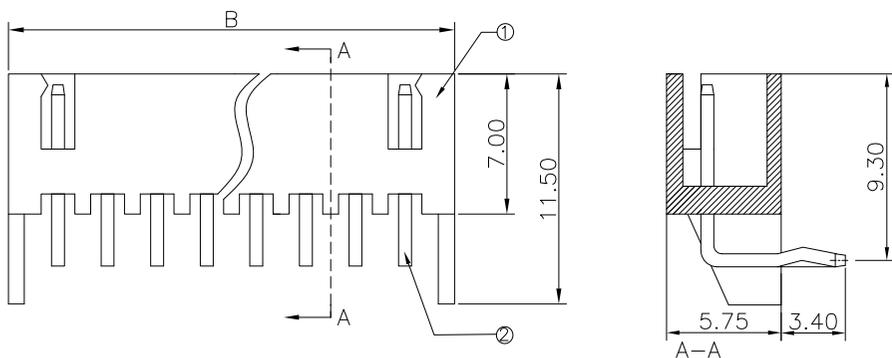

Poles	Dimension mm (in.)		Poles	Dimension mm (in.)	
	A	B		A	B
2	2.50(0.098)	7.50(0.295)	12	27.50(1.802)	32.50(1.280)
3	5.00(0.197)	10.00(0.394)	13	30.00(1.181)	35.00(1.378)
4	7.50(0.295)	12.50(0.492)	14	32.50(1.280)	37.50(1.476)
5	10.00(0.394)	15.00(0.591)	15	35.00(1.378)	40.00(1.575)
6	12.50(0.492)	17.50(0.689)	16	37.50(1.476)	42.50(1.673)
7	15.00(0.591)	20.00(0.787)	17	40.00(1.575)	45.00(1.772)
8	17.50(0.689)	22.50(0.886)	18	42.50(1.673)	47.50(1.870)
9	20.00(0.787)	25.00(0.984)	19	45.00(1.772)	50.00(1.969)
10	22.50(0.886)	27.50(1.802)	20	47.50(1.870)	52.50(2.067)
11	25.00(0.984)	30.00(1.181)			

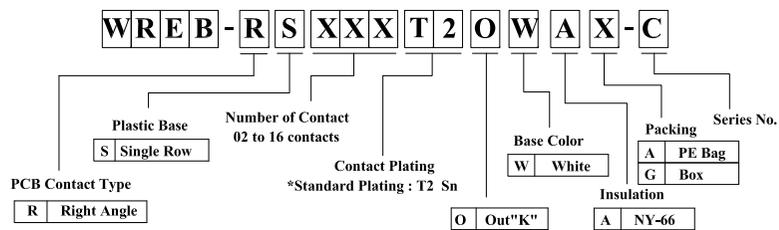

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE			PH2.5mm Wafer, Right Angle Single Row Contacts	
	X. ± 0.5	DRAWN	DATE	NO.	
	.X ± 0.3	LIUHU	04-13-10'	T003	
	.XX ± 0.2	CHECK	DATE	PART NO.	
	.XXX ± 0.1	APPROVED	DATE	CUSTOMER NO.	
角度	± 5°				

REV.	UNIT	SCALE	
A	mm	1:1	

(Q2-R03-01A) ST-R05-07