

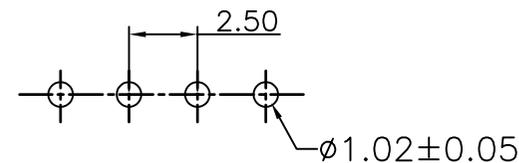
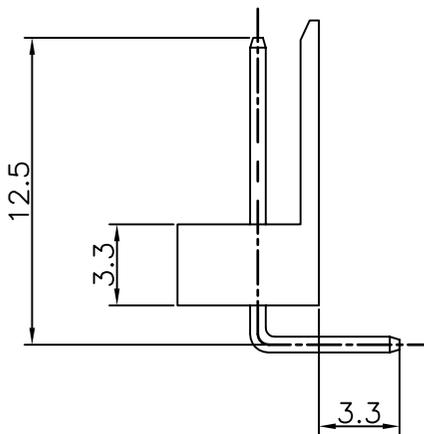

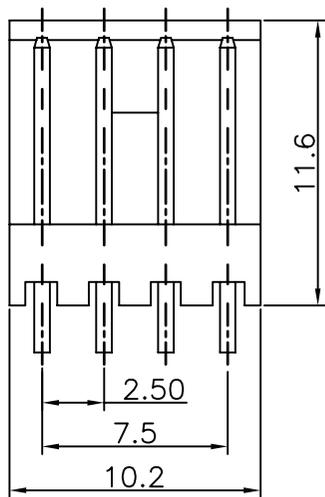


REV.	DESCRIPTION	DATE
A0	New Drawing	2007/02/07

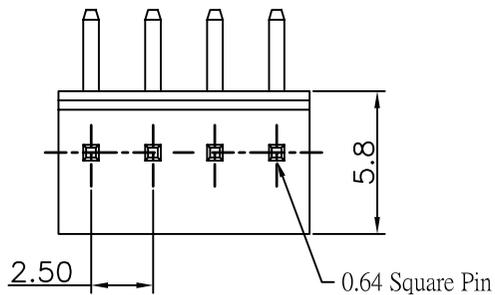

P.C.B LAYOUT

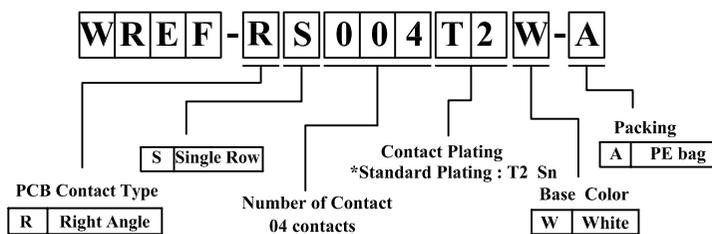

**Electrical**

**Current Rating: 3A AC, DC**

**Voltage Rating: 250V AC/ max.**

**Operating Temp.: -25°C ~ +85°C**

**Insulation Resistance: 1000 Megohms min.**

**Withstand Voltage: 800V AC/ min.**

**Contact Resistance: 20m OHM/ max.**

**Material**

**Terminal Material: Tin/ Gold Plated**

**Material: Nylon 66, UL94V-0**

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE		2.5mm(0.1") Wafer, Right Angle Single Row 04 Contacts	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		YangFeng		02-07-07'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		Fuqianshan		02-07-07'	
角度 ± 5°		APPROVE		DATE	
		YEH		02-07-07'	
		DWG. NO.		WRF001	
		PART NO.		WREF-RS004T2W-A	
		CUSTOMET NO.			

REV.	UNIT	SCALE
A0	mm	4:1

