

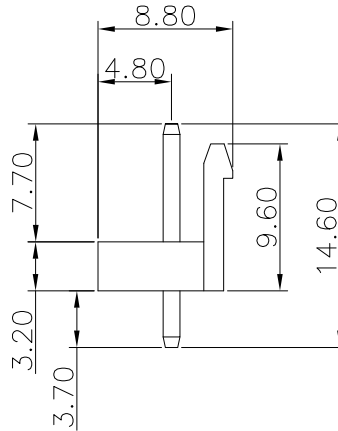
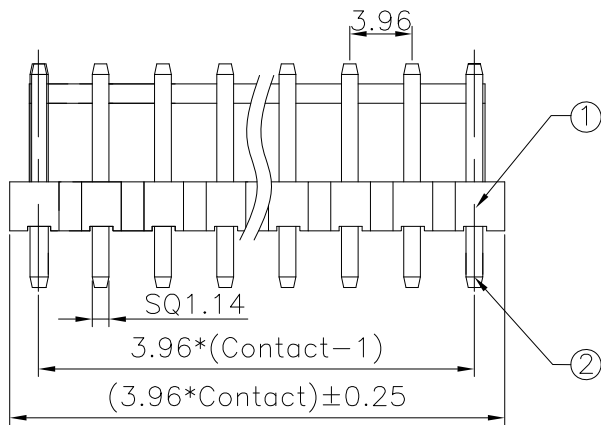
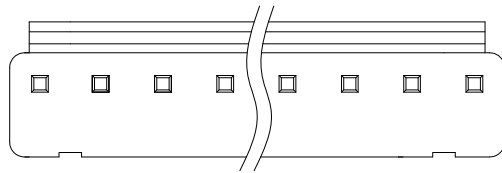


REV.	DESCRIPTION	DATE
A	New Drawing	2010/07/09
B	修改電氣特性	2022/12/01

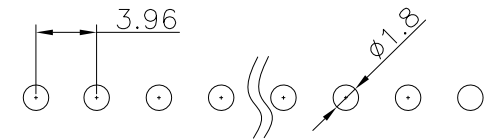

LTR	Part Name	Material	Description	QTY
1	Housing	NY-66 UL94V-0	Initial : 1000M Ohms Min.	1
2	Contact	Brass	Voltage rating: 250V AC. DC Current Rating : 7.0A Initial : 20m Ohms Max.	XX

Temperature Rating : -25°C ~ +85°C .  
Dielectric Withstanding Voltage : 800V AC/Min

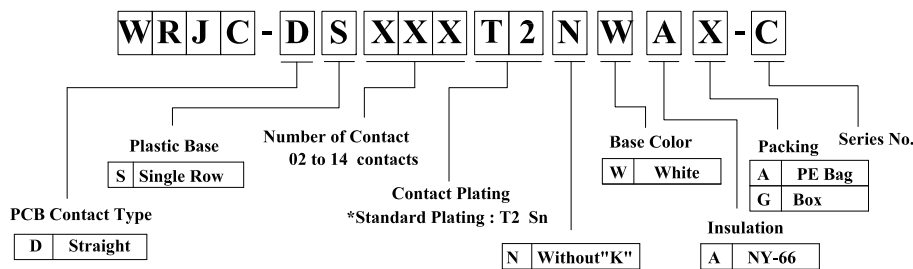

### P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE	3.96mm(0.155") Wafer, Straight Single Row 02 to 14 Contacts		
X. ± 0.5	DRAWN	DATE	NO.	
.X ± 0.3	Tom	12-01-22'	T003	
.XX ± 0.2	CHECK	DATE	PART NO.	
.XXX ± 0.1	APPROVED	DATE	WRJC-DSXXX T2 N W A X - C	
角度 ± 5°			CUSTOMER NO.	

REV.	UNIT	SCALE	
B	mm	1:1	

(Q2-R03-01A) ST-R05-07