



REV.	DESCRIPTION	DATE
A0	New Drawing	2007/03/14

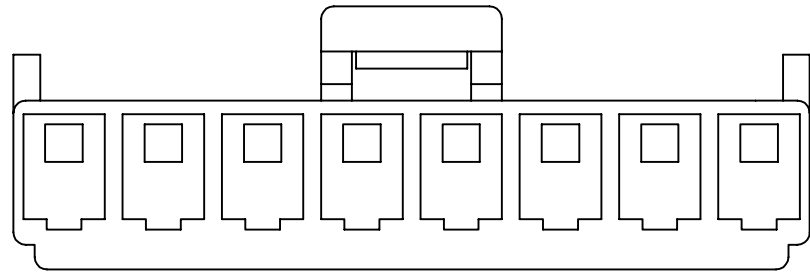

Specifications

Current Rating: 5A AC, DC
Voltage Rating: 250V AC Maximum
Operating Temp: -25°C ~ +85°C
Contact Resistance: 10mΩMax
Insulation Resistance: 1000ΩMin
Terminal Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0

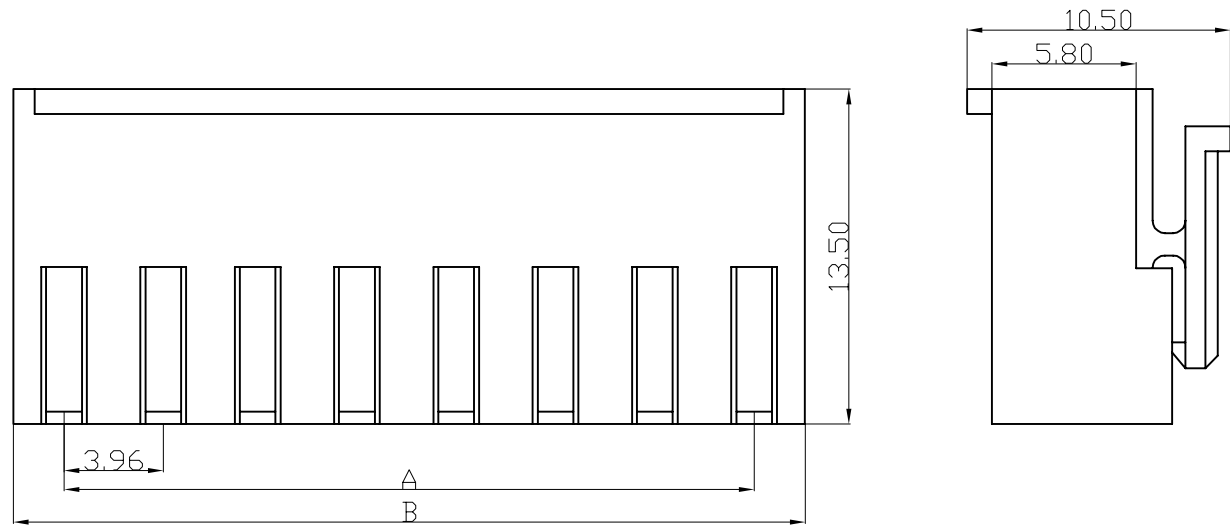

Dimension mm

Circuits	Dim. A	Dim. B
2	3.96	8.04
3	7.92	12.10
4	11.88	15.96
5	15.84	20.00
6	19.80	23.90
7	23.76	27.90
8	27.72	31.75
9	31.68	35.88
10	35.64	39.84
11	39.90	43.74
12	43.56	47.74
13	47.52	51.70
14	51.48	55.66

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

X. ± 0.5
.X ± 0.3
.XX ± 0.2
.XXX ± 0.1
角度 ± 5°

TITLE

3.96mm Wire-to-Board Housing

DRAWN
Hanping

DATE
03-14-07'

DWG. NO.
3961V-H

CHECK
Hanping

DATE
03-14-07'

PART NO.
WRJC-H-XX

APPROVE
YEH

DATE
03-14-07'

CUSTOMET NO.

REV.	UNIT	SCALE
A0	mm	2:1

