


REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/24

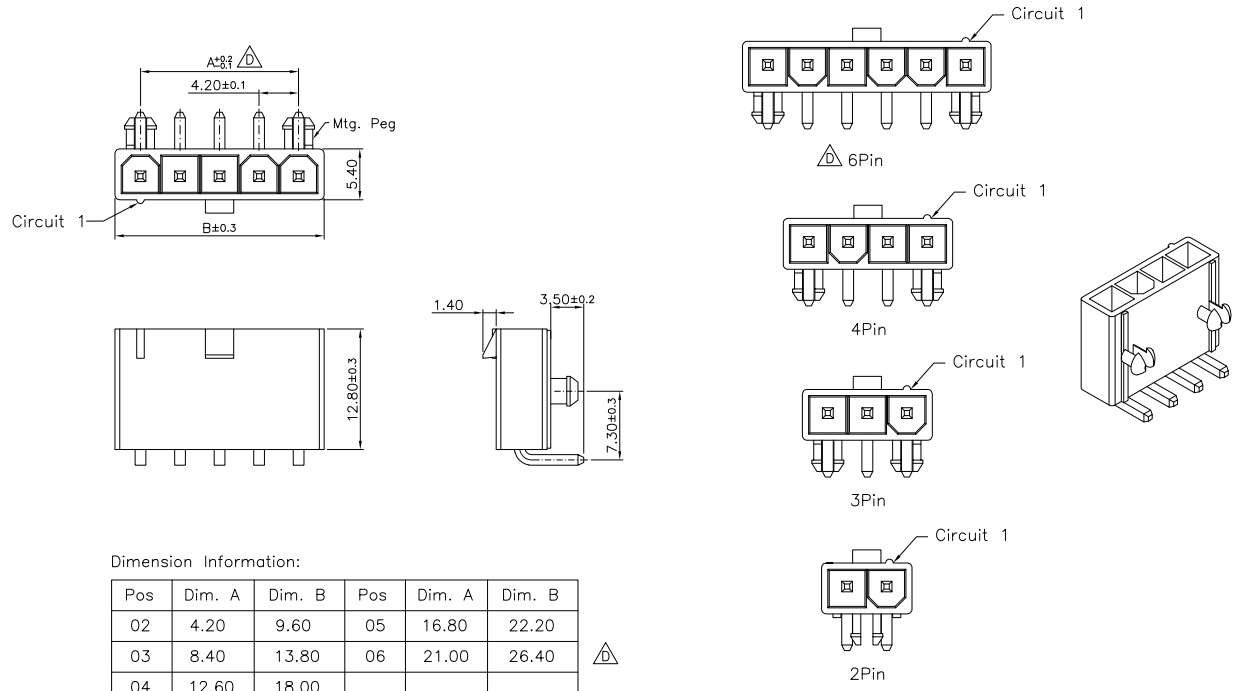

Dimension Information:

Pos	Dim. A	Dim. B	Pos	Dim. A	Dim. B
02	4.20	9.60	05	16.80	22.20
03	8.40	13.80	06	21.00	26.40
04	12.60	18.00			



Specifications:
 Current Rating:9.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m Ohm. Max.
 Insulation Resistance:1,000M Ohm. Min.
 Withstanding Voltage:1,500V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C

Materials And Finish
 Insulator:Nylon66 (UL94V-0)
 Insulator Color:White
 Terminal:Copper Alloy
 Plated:Tin Plated

Housing:WRKD-H420XXXTAA-H-B1
Housing:WRKD-H420XXXWAA-H-B2
Terminal:CU-XT2-H-BX

Housing:WRKD-H420XXXTAA-H-C1
Housing:WRKD-H420XXXWAA-H-C2
Terminal:CU-XT2-H-CX

Wafer:WRKD-DSXXXT2NWAA-H
Wafer:WRKD-DDXXXT2NWAA-H
Wafer:WRKD-RSXXXT2NWAA-H
Wafer:WRKD-RDXXXT2NXAA-H

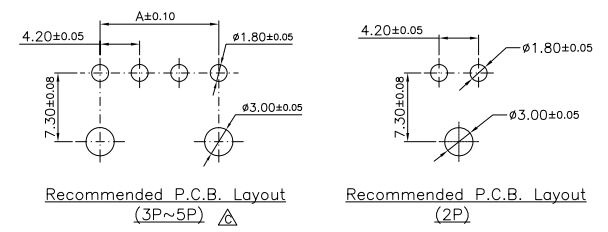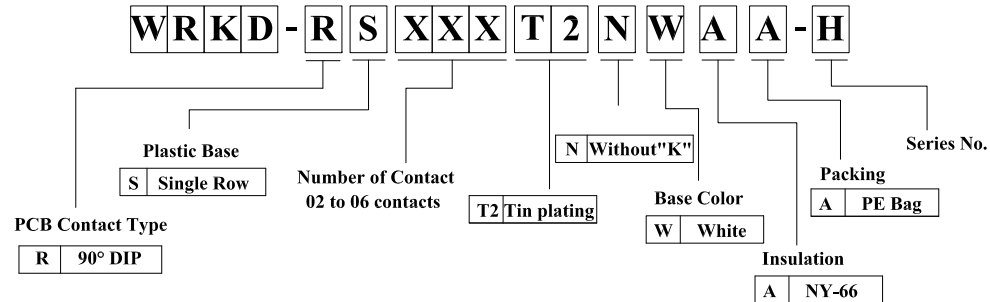

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	Power Wafer PH4.2 Single Row R/A Type	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Annie	10-24-19'	T230
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	Annie	10-24-19'	WRKD-RSXXXT2NWAA-H
角度 ± 5°	APPROVED	DATE	CUSTOMER NO.
	Tom	10-24-19'	

REV.	UNIT	SCALE	
A	mm	1:1	