

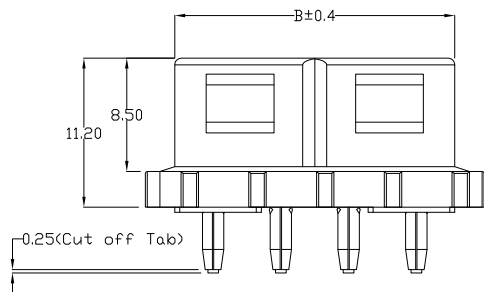
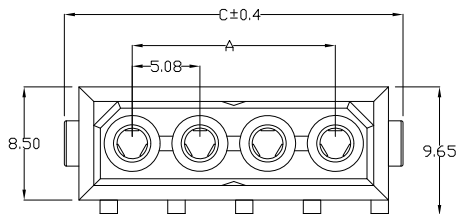


REV.	DESCRIPTION	DATE
A	New Drawing	2010/04/13

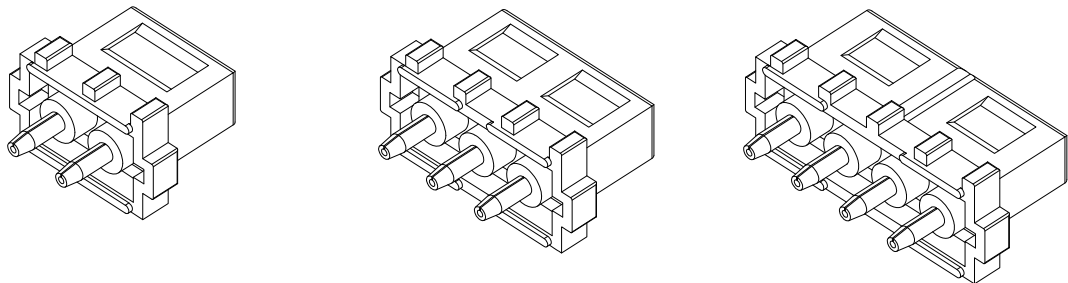


Features:

- 2 ~ 4 circuits available
- Plastic material: UL 94V-2 nylon
- Pin material: Tin-plated phosphor bronz
- Mates with ALEX 6060-N housing
- Mates with ALEX 9090 headers

Specification:


- Current rating: 7A Max.
- Voltage rating: 250V AC, 175V DC
- Dielectric withstanding voltage: 1500V AC/minute
- Non operating temperature : -40°C ~ 105°C
- Operating temperature : 0°C ~ 75°C



P.C.B LAYOUT

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
2	5.08	10.84	15.24
3	10.16	15.92	20.32
4	15.24	21.00	25.40

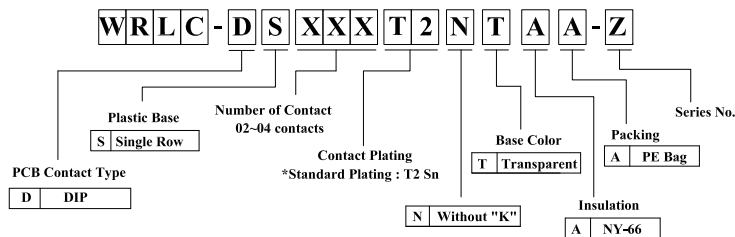

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	Wafer PH5.08 H8.5 Vertical Power Header	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		LIUHU	04-13-10'	T062
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		APPROVED	DATE	WRLC-DSXXXT2NTAA-Z
角度 ± 5°				CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	