
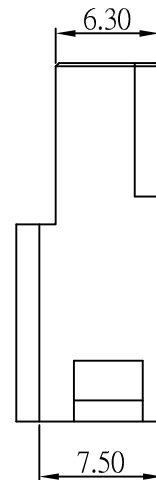
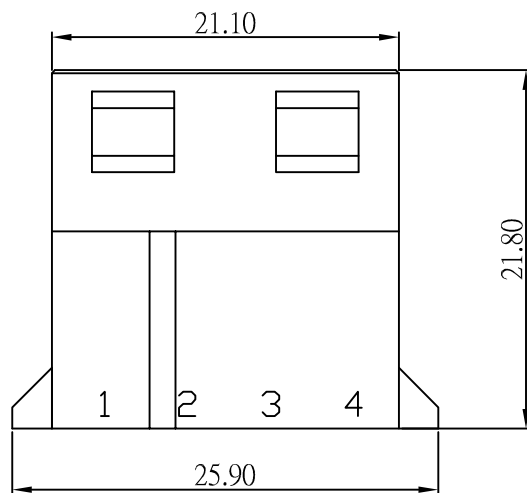


REV.	DESCRIPTION	DATE
A	New Drawing	2011/11/10

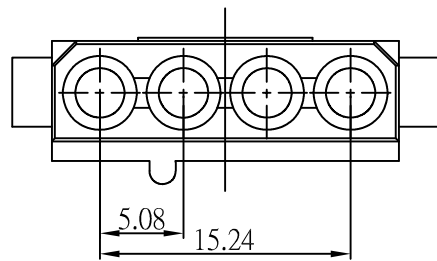

SPECIFICATIONS

Current rating : 5.0A AC,DC

Voltage rating : 250V AC,DC

Temperature range : -25°C to +85 °C

Contact resistance : 10mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 1500V AC/minute

Material : Nylon 66, UL94V-2

WRLB - H508004A - T

RoHS Compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		Wafer Housing PH5.08 (Male) 4P NY-66 UL-94V2	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		YuHongYu		11-10-11'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		APPROVED		DATE	
角度 ± 5°				NO. T051	
				PART NO. WRLB-H508004A-T	
				CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	1:1	