

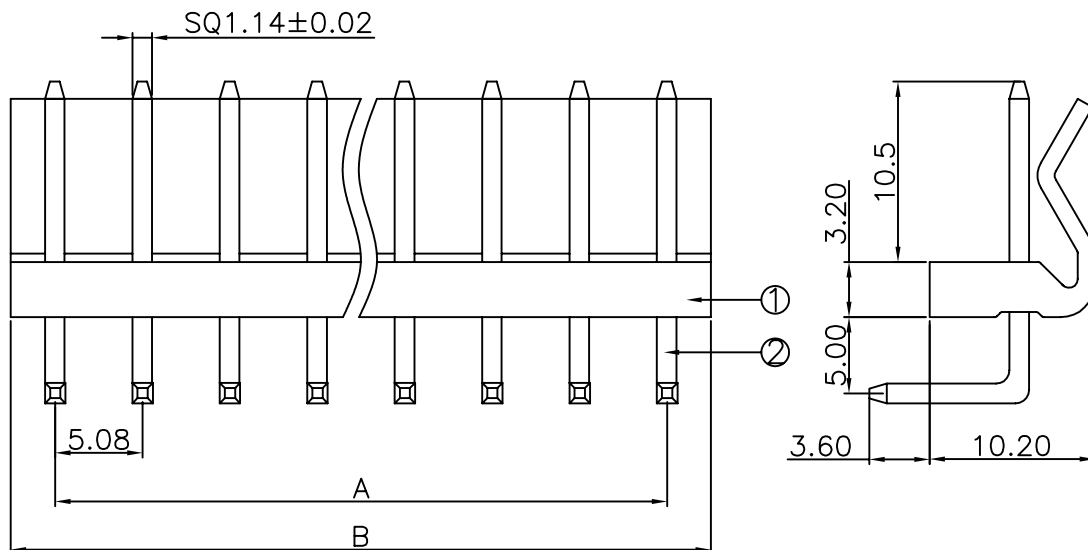


REV.	DESCRIPTION	DATE
A0	New Drawing	2009/07/20

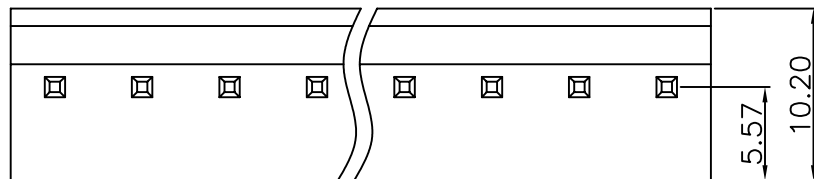

LTR	Part Name	Material	Description	QTY
1	Housing	NY-66 UL94V-2	Initial : 1000M Ohms Min.	1
2	Contact	Copper Alloy	Current Rating :5.0A Voltage Rating :250V Initial : 20m Ohms Max.	xx


Temperature Rating : -25°C ~ +85°C .  
Dielectric Withstanding Voltage :1000V AC/Min

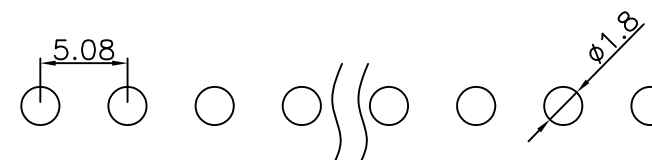

P.C.B LAYOUT

RoHS compliant

**WRLD-RSXXXT2NNA-C**

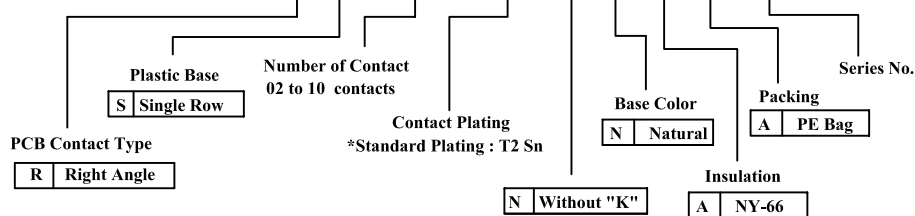

Poles	Dimension	
	A	B
2	5.08	10.22
3	10.16	15.30
4	15.24	20.38
5	20.32	25.46
6	25.40	30.54
7	30.48	35.62
8	35.56	40.70
9	40.64	45.78
10	45.72	50.86

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE	Wafer PH5.08 90度 NY-66材質	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	SUNCUI	07-20-09'	T003
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	WRLD-RSXXXT2NNA-C
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
A0	mm	2:1	