






REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/23

Specifications:

Current Rating:5.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:AC 1500V AC/minute
Operating Temperature Range:-25°C ~ +105°C


Material and Finish

Insulator:High Temp. Plastic (Nylon 46 UL94V-0)
Insulator Color:Black
Terminal:Copper Alloy
Finish:Tin Plated




10P~24P:The first 4pin kink and last 4pin Kink

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	6.7	—	14	24.7	18.0
4	9.7	3.0	16	27.7	21.0
6	12.7	6.0	18	30.7	24.0
8	15.7	9.0	20	33.7	27.0
10	18.7	12.0	22	36.7	30.0
12	21.7	15.0	24	39.7	33.0




PCB Layout

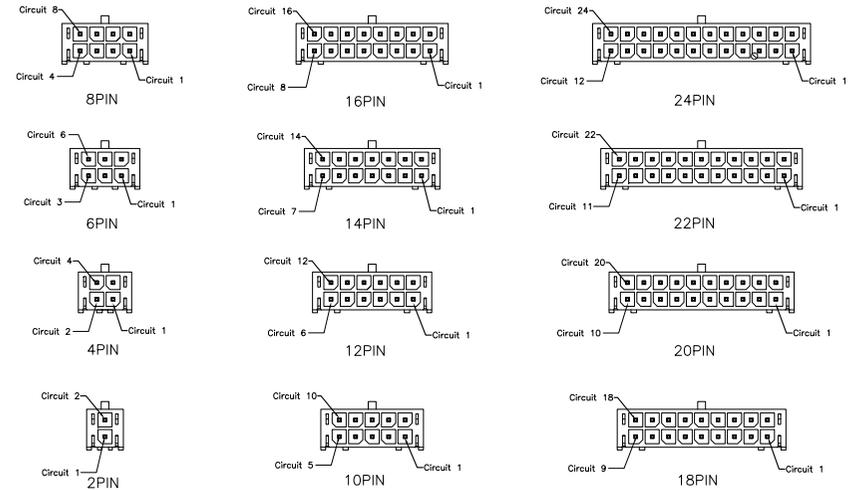

2~24P Protection Key Drawing(Ref.)

WRGD - D D XXX T3 W B L C - H

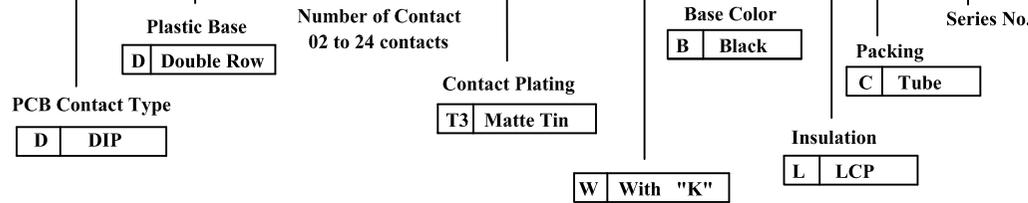

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		PH3.0 Power Wafer Straight Type	
X. ± 0.5	DRAWN	Annie	DATE	NO.	
.X ± 0.3			10-23-19'	T230	
.XX ± 0.2	CHECK	Annie	DATE	PART NO.	
.XXX ± 0.1			10-23-19'	WRGD-DDXXX T3 W B L C - H	
角度 ± 5°	APPROVED	Tom	DATE	CUSTOMER NO.	
			10-23-19'		

REV.	UNIT	SCALE	
A	mm	1:1	