

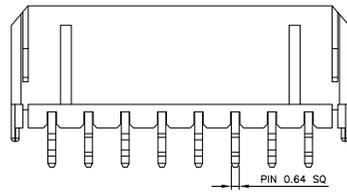



REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/29

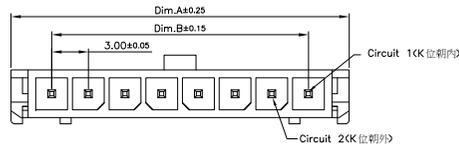

Housing:WRGD-H300XXXBAA-H-E1
Housing:WRGD-H300XXXBAA-H-E2
Terminal:CU-XXX-H-EX

Housing:WRGD-H300XXXBAA-H-F1
Housing:WRGD-H300XXXBAA-H-F2
Terminal:CU-XXX-H-FX

Wafer:WRGD-DSXXXT2WBLA-H
Wafer:WRGD-DDXXXT2WBEA-H
Wafer:WRGD-RSXXXT2NBLA-H
Wafer:WRGD-RDXXXT2NBLA-H

Specifications:

Current Rating:5.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:10m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:1,500V AC For One Minute

Operating Temperature Range:-25°C ~ +105°C











Material and Finish

Insulator:High Temp. Plastic(LCP UL94V-0)


Terminal:Copper Alloy

Plating:Tin Plated

Positions	Dimension		Positions	Dimension	
	A	B		A	B
2	9.65	3.00	8	27.65	21.00
3	12.65	6.00	9	30.65	24.00
4	15.65	9.00	10	33.65	27.00
5	18.65	12.00	11	36.65	30.00
6	21.65	15.00	12	39.65	33.00
7	24.65	18.00			

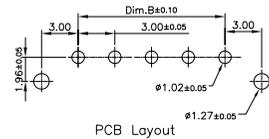

(2-12)Pin防呆位置分部示意图

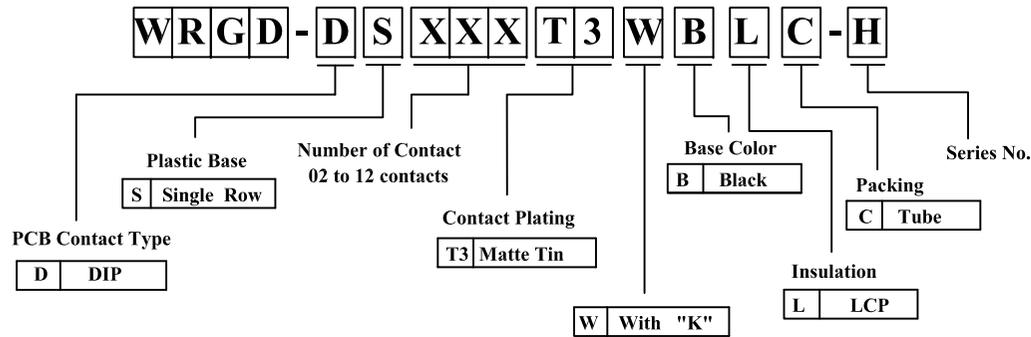

RoHS compliant

竣豪電子股份有限公司 Superior Tech Co., Ltd.			General Tolerance		TITLE		PH3.0 Power Wafer Single Row Straight Type	
			X. ± 0.5	DRAWN		DATE	NO.	
REV. A			UNIT mm		SCALE 1:1		ANNE 10-29-19'	
							CHECK ANNE 10-29-19'	
			APPROVED TOM 10-29-19'		DATE 10-29-19'		CUSTOMER NO.	
			角度 ± 5°					