

RECOMMENDED PCB LAYOUT

REV.	DESCRIPTION	DATE
A	New Drawing	2011/08/02
B	更新圖面	2014/08/21
C	加長端子倒角	2021/06/21

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.


2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	BRASS C2680 T=0.30mm	1	PLATED NICKEL
1	TERMINAL	PHOSPHOR BRONZE C5191 T=0.25mm	4	PLATED GOLD/TIN

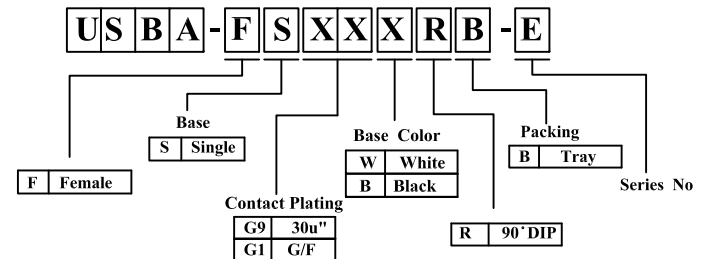

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE	USB A/F DIP 90度 單層 T型 內扣	
X.	± 0.5	DRAWN	DATE	NO.
.X	± 0.3	Jacky	06-21-21'	T006
.XX	± 0.2	CHECK	DATE	PART NO.
.XXX	± 0.1	Tom	06-21-21'	USBA-FSXXXRB-E
角度	± 5°	APPROVED	DATE	CUSTOMER NO.
		Joe	06-21-21'	

REV.	UNIT	SCALE	
C	mm	1:1	