



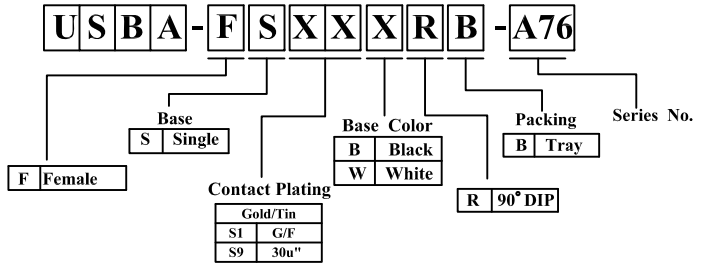



REV.	DESCRIPTION	DATE
A	New Drawing	2021/07/19



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.

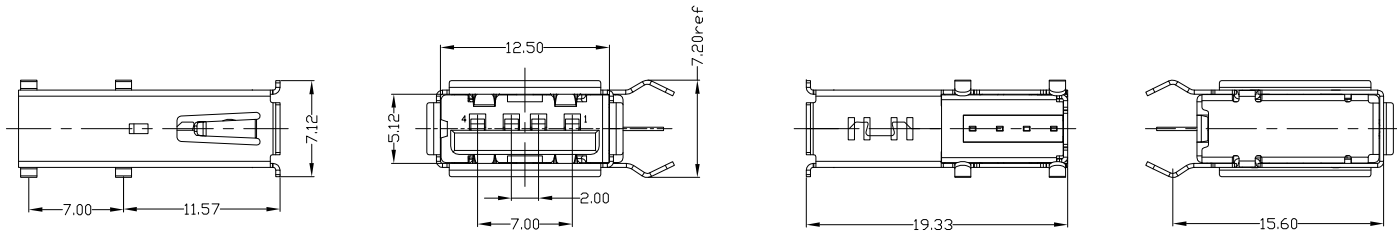

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5	BACK COVER	SPCC	1	PLATED NICKEL
4	BOTTOM COVER	PBT	1	UL94V-0
3	HOUSING	PBT	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		USB AF 側插長體	
X. ± 0.5		DRAWN	DATE	NO.	
.X ± 0.3		Jacky	07-19-21'	T006	
.XX ± 0.2		CHECK	DATE	PART NO.	
.XXX ± 0.1		Tom	07-19-21'	USB A-FSXXXRB-A76	
角度 ± 5°		APPROVED	DATE	CUSTOMER NO.	
		Joe	07-19-21'		

REV.	UNIT	SCALE	
A	mm	1:1	