

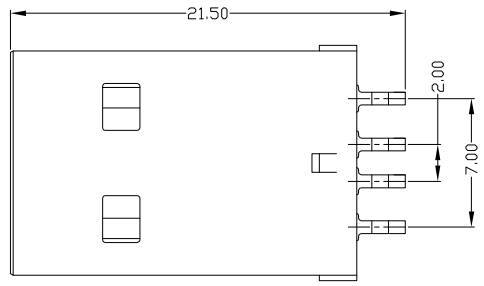
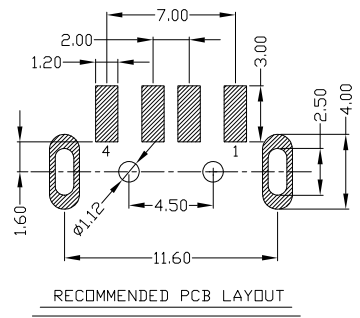
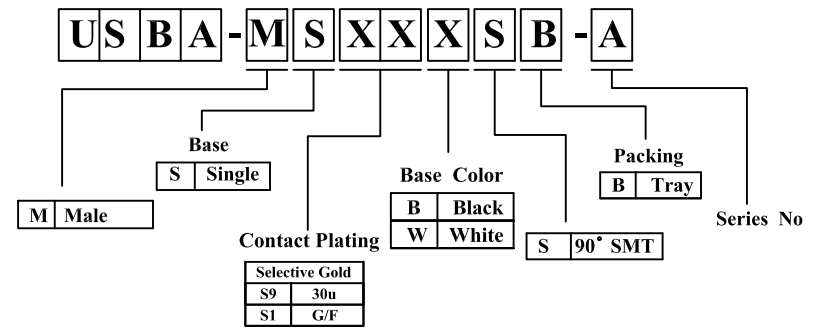
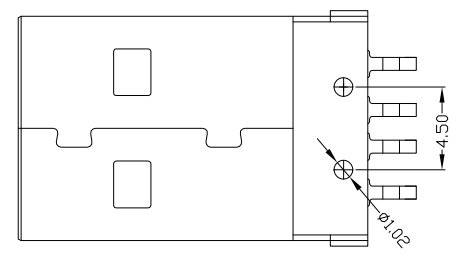


REV.	DESCRIPTION	DATE
A	修改材質	2010/11/11
B	更新圖面	2021/12/03

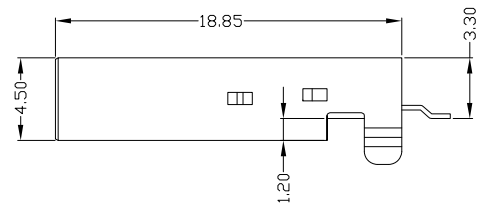

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.

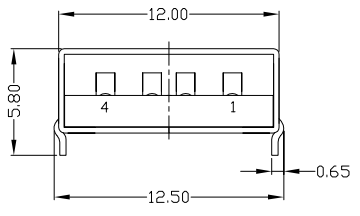

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	LCP	1	UL94V-0
2	SHELL	SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

RoHS compliant

竣豪電子股份有限公司 Superior Tech Co., Ltd.		General Tolerance		TITLE		USB A公90度SMT 1u"/30u" LCP料	
		X. ± 0.5	DRAWN		DATE	NO.	
REV. B UNIT mm SCALE 1:1		.X ± 0.3	Jacky		12-03-21'	T006	
		.XX ± 0.2	CHECK		DATE	PART NO.	
		.XXX ± 0.1	Tom		12-03-21'	USBA-MSXXXSB-A	
		角度 $\pm 5^\circ$	APPROVED		DATE	CUSTOMER NO.	
			Tom		12-03-21'		